




**LED Luminaires**  
**2025 Stock Guide**



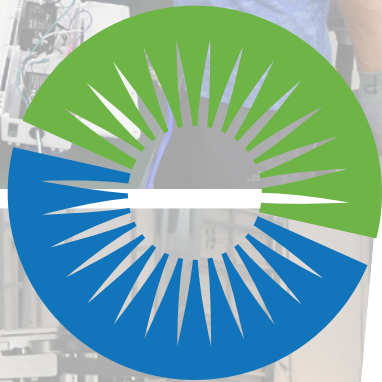

**SLG<sup>®</sup>**  
**LIGHTING**

Your experience matters.



# Experience Pledge:

**"The customer's experience comes first. We are always available, provide an ideal product mix, offer creative off-market solutions, and extend our network of lighting professionals to you at no extra cost."**







LED Luminaries



Lighting Controls



LED Sports Luminaries



Headquarters in Houston, TX

## WE ARE A SERVICE FIRST COMPANY:

Through vertical integration, we manage and control every lighting product we produce. We bring 30+ years of LED lighting experience and a customer service focus mindset.









# TABLE OF CONTENTS

## Interior Luminaires

01

### High Bays

#### Linear

- 02 HCL Select Selectable High Bay
- 04 HL Select G3 Linear High Bay
- 05 HEC G2 Selectable High Bay
- 06 HES Selectable High Bay

#### Round

- 07 HX Select Selectable Extreme High Bay
- 08 HFO G3 Selectable Round High Bay
- 09 HFS Selectable Round High Bay

#### Square

- 10 CSF NSF Rated High Bay

### Light Bar Kit

- 12 RBK Light Bar Retrofit Kit

### Lay-in Troffers

- 13 TDB Bluetooth Troffer
- 14 TDSC Selectable Recessed Troffer
- 15 TDS Selectable Troffer

### Retrofit Troffers

- 16 TDRB Bluetooth Troffer - Retrofit Kit
- 17 TDRK Troffer - Retrofit Kit

### Panels

- 18 TPB Bluetooth Panel
- 19 TPSC Selectable Panel
- 20 TPS G3 Selectable Backlit Panel

### Strips

- 21 TSB Bluetooth Strip
- 22 TSS Selectable Strip
- 23 TSC Select Selectable Strip

### Retrofit Strips

- 24 TSRK Selectable Strip - Retrofit

### Low Bay

- 25 VLB G2 Selectable Low Bay

## Stairwell

- 26 TSF Select Selectable Stairwell

### Surface Wraparound

- 27 TR Select Selectable Wraparound
- 28 TRC Select Selectable Wraparound

### Vapor Tight

- 29 VTH Selectable Vapor Tight High Bay
- 30 VTSC Selectable Vapor Tight Strip
- 31 VTS Selectable Vapor Tight Strip

### Design XP™

#### Linear

- 33 SAL M27 Selectable Slim Architectural Linear

#### Cylinder

- 37 CLS Architectural Cylinder Downlight

#### Commercial

- 38 SLP Selectable Slot Panel
- 39 TL G2 Selectable Luxe Troffer
- 40 TPL G2 Selectable Luxe Backlit Panel
- 41 TG T-Grid Linear Light
- 42 SCL Slim Cove Light
- 43 Serenity Series Suspended Architectural Up/Down Light
- 44 Firefly Series Slim Architectural Wall Light

### Downlights

#### Pro/Commercial

- 45 DEP G2 Selectable Downlights
- 47 DRW G1 Regress Wafer Downlight
- 48 DRS G3 Selectable Retrofit Downlight
- 49 DRC G1 Commercial Downlight - Retrofit Series

#### Multi-Family / Residential

- 50 DSD Selectable Surface Mount Downlight
- 51 DS G2 SurfaceSlice Downlight
- 52 DF G2 Ultra Thin Downlight

#### SWIFTY Series / Gimbal

- 53 DGD Downlight-Gimbal Direct
- 54 DGR Downlight-Gimbal Regress
- 55 DGS Downlight-Gimbal Swivel
- 56 DGW Downlight-Gimbal Wafer
- 57 DRF Downlight-Regress



**Exterior Luminaires** **59**

**Area Lights**

- 60 **ALW Select** Selectable Area Light - Wave Series
- 62 **ALF G1** Selectable Area Light - Flex Series
- 63 **UDD** Dusk To Dawn

**Flood Lights**

- 65 **FLF G1** Selectable Floodlight - Flex Series
- 66 **FSS G1** Selectable Flood Light
- 67 **FDC G1** Flood Light Series
- 68 **FR Select** Selectable Round Floodlights

**Landscape**

- 69 **AP LS1** Selectable Post Top
- 70 **AB** Bollard Luminaire

**Wall Pack**

- 71 **WV Select G2** Selectable Cutoff Wall Pack
- 72 **WFC** Selectable Full Cutoff Wall Pack
- 73 **WPC G1** Adjustable Throw Wall Pack
- 74 **WMC Select** Selectable Wall Pack
- 75 **WME G1** Emergency Wall Pack
- 76 **WCE G1** Contractor Emergency Wall Pack

**Canopy**

- 78 **CGC** Gas Station Canopy
- 79 **CSC** Selectable Canopy

**Parking Garage**

- 80 **PGC G1** Controls Ready Parking Garage
- 81 **PG G3** Selectable Parking Garage
- 82 **VPG G2** Versatile Parking Garage

**Temporary Lighting**

- 83 **TEMP G2** High Impact String Lights
- 84 **TEMPW** Temporary Work Light

**Sports Lighting**

- 85 **FSP Dual** Remote Driver Sports Light
- 86 **FSP Dual** RGB RGB Sports Light

**SLG Sync** **89**

- 89 **SLG Sync Overview**
- 90 **Application Guide**

*Bluetooth*

- 91 **MSB-DCE-06 (W)** / **MSB-ACE-04**
- 92 **MSB-ACI-01** / **MSB-DCE-07 (W)**
- 93 **MSB-DCE-08-TL25/BT5.0** / **MSB-DCI-08-BH4S-BT5.0**
- 94 **MSE-DCI-08**

*Standalone*

- 95 **MS-DCE-09-L7 (W)** / **MS-DCE-08-TL25**
- 96 **MS-ACI-01**

*Nodes/Controllers*

- 96 **FCE-ACI-03**
- 97 **FCB-DCE-02 (W)** / **FCB-ACI-02**
- 98 **ZCB-AC-04 (W)** / **ZCB-AC-09**

- 99 **Accessories**

**SLG Safeguard** **101**

- 101 **SLG Safeguard Overview**
- 102 **Exit Signs**
- 103 **Combos**
- 104 **Emergency Lights**

**FREE Layout Request** **105**

**Training Center** **107**

**Mobile Showroom** **108**

**Resources** **109**

**Notes** **111**



# INTERIOR LUMINAIRES

- 02 High Bays
- 11 Light Bar Kit
- 13 Lay-In Troffer
- 16 Retrofit Troffers
- 18 Panels
- 21 Strips
- 24 Retrofit Strips
- 25 Low Bay
- 26 Stairwell
- 27 Surface Wraparound
- 29 Vapor Tight
- 32 Design XP™
- 45 Downlights





# HCL Select

## LED Selectable High Bay

### Specifications



Switch Selectable  
**12,000 - 38,100 Lumens\***



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**85 - 260 Watts\***

### Controls Compatibility



Motion Sensor - MSB-DCE-06  
(See page 91)  
Bluetooth Node - FCB-DCE-02  
(See page 97)

Emergency Backup: EMD-DH32D-UNV-145  
EMA-LH40D-HVU-400

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.

SKU SAVER  
RATING

**12**

Replaces up to 12 similar static luminaires.

### PERFORMANCE XP



Catalog Number	Description	Lumens	Watts	Voltage
HCL LS240 G2 FSK	HCL Compact High Bay, 4 Level Wattage Adjustable, Gen 2, CCT Selectable, White finish	Selectable 12,000 - 24,100 Lm	Selectable 85- 160 W	120 - 277V
HCL LS240 G2 HVU FSK	HCL Compact High Bay, 4 Level Wattage Adjustable, Gen 2, CCT Selectable, White finish	Selectable 12,000 - 24,100 Lm	Selectable 85- 160 W	347V - 480V
HCL LS360 G2 FSK	HCL Compact High Bay, 4 Level Wattage Adjustable, Gen 2, CCT Selectable, White finish	Selectable 18,000 - 38,100 Lm	Selectable 115- 260 W	120-277V
HCL LS360 G2 HVU FSK	HCL Compact High Bay, 4 Level Wattage Adjustable, Gen 2, CCT Selectable, White finish	Selectable 18,000 - 38,100 Lm	Selectable 115- 260 W	347V - 480V



# BEST IN CLASS



*Our most reliable  
high bay... is now  
controls ready **and**  
selectable.*

## HL Select G3

PERFORMANCE **XP**

- *Controls Ready*
- *10 Year Warranty*





# HL Select G3

## LED Linear High Bay

### Specifications



**24,000 - 75,000 Lumens\***



**5000K CCT**



**150 - 450 Watts\***

### Controls Compatibility



Motion Sensor - MSB-DCE-06 (See page 91)

MS-DCE-09-L7 (See page 95)

Bluetooth Node - FCB-DCE-02  
(See page 97)

Emergency Backup.

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

\*Range based on series, individual fixtures within the series will differ.



**PERFORMANCE XP**

Catalog Number	Description	Lumens	Watts	Voltage
HL LS360 AL G3 5K	LED Linear High Bay - Selectable Power, 5000K, Aisle Lens*, 2 Light Bars, Standard Voltage, White	Selectable 24,000 - 36,000 Lm	Selectable 150 - 225 W	120V-277V
HL LS600 AL G3 5K	LED Linear High Bay - Selectable Power, 5000K, Aisle Lens*, 4 Light Bars, Standard Voltage, White	Selectable 40,000 - 60,000 Lm	Selectable 250 - 375 W	120V-277V
HL LS720 AL G3 5K	LED Linear High Bay - Selectable Power, 5000K, Aisle Lens*, 6 Light Bars, Standard Voltage, White	Selectable 48,000 - 75,000 Lm	Selectable 300 - 450W	120V-277V
HL LS360 AL G3 HVU 5K	LED Linear High Bay - Selectable Power, 5000K, Aisle Lens*, 2 Light Bars, High Voltage, White	Selectable 24,000 - 36,000 Lm	Selectable 150 - 225 W	347V - 480V
HL LS600 AL G3 HVU 5K	LED Linear High Bay - Selectable Power, 5000K, Aisle Lens*, 4 Light Bars, High Voltage, White	Selectable 40,000 - 60,000 Lm	Selectable 250 - 375 W	347V - 480V
HL LS720 AL G3 HVU 5K	LED Linear High Bay - Selectable Power, 5000K, Aisle Lens*, 6 Light Bars, High Voltage, White	Selectable 48,000 - 75,000 Lm	Selectable 300 - 450W	347V - 480V

\*Also available in Frosted Lens option.



# HEC G2

## LED Selectable High Bay

### Specifications

-  Switch Selectable  
**14,800 - 31,000 Lumens**
-  Switch Selectable  
**4000K - 5000K CCT**
-  Switch Selectable  
**100 - 225 Watts**

### Controls Compatability

-  Motion Sensor - MSB-DCE-06  
(See page 91)  
Bluetooth Node - FCB-DCE-02  
(See page 97)
- Emergency Backup: ES-EIA32-015  
EMA-LH40D-HVU-400

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)

 **8**  
Replaces up to 8 similar static luminaires.



CONTRACTOR XP



Catalog Number	Description	Lumens	Watts	Voltage
HEC LS300 G2 FSK	LED Linear High Bay - Standard Voltage	Selectable 14,800 - 30,500 Lm	Selectable 100- 210 W	120-277V
HEC LS300 G2 HVU FSK	LED Linear High Bay - High Voltage	Selectable 15,000 - 31,000 Lm	Selectable 110- 225 W	347V - 480V



# HES G1

## LED Selectable High Bay

### Specifications



Switch Selectable  
**15,000 - 36,000 Lumens\***



Switch Selectable  
**4000K - 5000K CCT**



Switch Selectable  
**100 - 240 Watts\***

### Controls Compatibility



Motion Sensor - MSB-DCE-06  
(See page 91)  
Bluetooth Node - FCB-DCE-02  
(See page 97)

Emergency Backup: EMD-DH24D-UNV-260  
EMD-DH32D-UNV-190

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.

SKU SAVER  
RATING

6

Replaces up to 6 similar static luminaires.



CONTRACTOR XP

Catalog Number	Description	Lumens	Watts	Voltage
HES LS240 G1 FSK	LED Linear High Bay - Standard Voltage	Selectable 15,000 - 24,000 Lm	Selectable 100 - 160 W	120 - 277V*
HES LS360 G1 FSK	LED Linear High Bay - Standard Voltage	Selectable 24,000 - 36,000 Lm	Selectable 160 - 240 W	120 - 277V*
HES LS240 G1 FSK-EMDDH24D-UNV-260	LED Linear High Bay - Standard Voltage - with EMD-DH24D-UNV-260 battery backup preinstalled.	Selectable 15,000 - 24,000 Lm	Selectable 100 - 160 W	120-277V
HES LS360 G1 FSK-EMDDH24D-UNV-260	LED Linear High Bay - Standard Voltage - with EMD-DH24D-UNV-260 battery backup preinstalled.	Selectable 24,000 - 36,000 Lm	Selectable 160 - 240 W	120-277V

\*Also available in HVU options.



# HX Select G2

## LED Selectable Extreme High Bay


### Specifications

 Switch Selectable  
30,000 - 70,000 Lumens

 4000K - 5000K CCT

 Switch Selectable  
168 - 420 Watts

### Controls Compatability

-  Motion Sensor - MSB-DCE-06  
(See page 91)
- Motion Sensor - FCB-DCE-02  
(See page 97)

Emergency Backup.

Full Spec Sheet  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)



### PERFORMANCE XP



Catalog Number	Description	Lumens	Watts	Voltage
HX LS700 WD G2 4K	HX High Bay with Built-In Bi-Level PIR Sensor Receptacle, 4000K CCT	Selectable 30,000 - 70,000 Lm	Selectable 168 - 420 W	120-277V
HX LS700 WD G2 5K	HX High Bay with Built-In Bi-Level PIR Sensor Receptacle, 5000K CCT	Selectable 30,000 - 70,000 Lm	Selectable 168 - 420 W	120-277V
HX LS700 WD G2 HVU 5K	HX High Bay with Built-In Bi-Level PIR Sensor Receptacle - High Voltage, 5000K CCT	Selectable 30,000 - 70,000 Lm	Selectable 168 - 420 W	347V - 480V



# HFO G3

## LED Round High Bay

### Specifications



Switch Selectable  
**12,000 - 36,000 Lumens\***



Switch Selectable  
**4000K - 5000K CCT**



Switch Selectable  
**64 - 230 Watts\***

### Controls Compatibility



Motion Sensor - MSB-DCE-06  
(See page 91)  
Bluetooth Node - FCB-DCE-02  
(See page 97)

**Emergency Backup:** EMA-DH15D-UNV-170 (pre-installed)

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*



**8**

Replaces up to 8 similar static luminaires.



**CONTRACTOR XP**

Catalog Number	Description	Lumens	Watts	Voltage
HFO LS270 G3 FSK	LED Round UFO High Bay - Third Generation	Selectable 12,000 - 28,000 Lm	Selectable 64- 160 W	120-277V*
HFO LS270 G3 FSK EMA-DH15D-UNV-170	LED Round UFO High Bay with pre-installed emergency backup	Selectable 12,000 - 28,000 Lm	Selectable 64- 160 W	120-277V*
HFO LS360 G3 FSK	LED Round UFO High Bay - Third Generation	Selectable 16,500 - 36,000 Lm	Selectable 92 - 230 W	120-277V*

\*Also available in HVU 347/480.

Available in  
Black, White, and  
Custom colors.



**Pre-installed Emergency Battery with  
mounting bracket.**



# HFS G1

## LED Selectable Round High Bay

### Specifications

- 
 Switch Selectable  
**12,325 - 34,800 Lumens\***
- 
 Switch Selectable  
**4000K - 5000K CCT**
- 
 Switch Selectable  
**85 - 240 Watts\***

### Controls Compatability

- 
 Motion Sensor - MSB-DCE-06  
 (See page 91)  
 Bluetooth Node - FCB-DCE-02  
 (See page 97)
- Emergency Backup:
  - EMA-RH30D-UNV-170 (Preinstalled)
  - EMA-RH40D-UNV-170 (Preinstalled)

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)


**6**

Replaces up to 6  
similar static  
luminaires.

*\*Range based on series, individual fixtures within the series will differ.*



CONTRACTOR XP



Catalog Number	Description	Lumens	Watts	Voltage
HFS LS220 G1 FSK	LED Round UFO High Bay	Selectable 12,325 - 21,750 Lm	Selectable 85- 150 W	120 - 277V
HFS LS300 G1 FSK	LED Round UFO High Bay	Selectable 16,675 - 29,000 Lm	Selectable 115- 200 W	120 - 277V
HFS LS360 G1 FSK	LED Round UFO High Bay	Selectable 20,300 - 34,800 Lm	Selectable 140- 240 W	120 - 277V*

\*Also available in HVU (277-480).



# CSF G1

## LED NSF Rated High Bay

### Specifications



Switch Selectable  
**12,000 - 30,000 Lumens\***



**5000K CCT**



Switch Selectable  
**60 - 150 Watts\***

### Controls Compatability



Motion Sensor - MSB-DCE-06  
(See page 91)  
Bluetooth Node - FCB-DCE-02  
(See page 97)

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



SKU SAVER  
RATING

**9**

Replaces up to 9  
similar static  
luminaires.

\*Range based on series,  
individual fixtures within the  
series will differ.

PERFORMANCE XP



Catalog Number	Description	Lumens	Watts	Voltage
CSF LS160 G15K	LED NSF Rated High Bay - Selectable Power, Gen 1, White Finish	Selectable 12,000 - 16,300 Lm	Selectable 60 - 80 W	120-277V
CSF LS300 G15K	LED NSF Rated High Bay - Selectable Power, Gen 1, White Finish	Selectable 24,000 - 30,000 Lm	Selectable 120 - 150 W	120-277V
CSF LS160 G1 HVU 5K	LED NSF Rated High Bay - Selectable Power, Gen 1, White Finish - High Voltage	Selectable 12,000 - 16,300 Lm	Selectable 60 - 80 W	277-480V
CSF LS300 G1 HVU 5K	LED NSF Rated High Bay - Selectable Power, Gen 1, White Finish - High Voltage	Selectable 24,000 - 30,000 Lm	Selectable 120 - 150 W	277-480V

SQUARE HIGH  
BAYS





# Upgrade easier, for less.


## RBK Series

### LED Retrofit Light Bar Kit

Keep your housing, lower your energy use.

#### CONTRACTOR XP

- Replaces tubes and tombstones.
- Simplified wiring.
- Upgrade multiple existing fixtures with just one product.



Two 2 ft bars.



Two 4 ft bars.



Four 4 ft bars.



# RBK G1

## LED Retrofit Light Bar Kit

### Specifications



Switch Selectable  
**3,800 - 7,000 Lumens\***



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**15 - 46 Watts\***

### Controls Compatability

EMA-DH25D-UNV-170

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



SKU SAVER  
RATING

**9**

Replaces up to 9  
similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*



Catalog Number	Description	Lumens	Watts	Voltage
RBK 2B2F LS35 G1 FSK	LED Retrofit Light Bar Kit - 2 Bars, 2ft - Replaces 2'x2' Troffer	Selectable 2,200 - 3,750 Lm	Selectable 15 - 25 W	120-277V
RBK 2B4F LS50 G1 FSK	LED Retrofit Light Bar Kit - 2 Bars, 4 ft - Replaces 2'x 4' Troffer	Selectable 3,000 - 5,425 Lm	Selectable 20 - 35 W	120-277V
RBK 2B4F LS70 G1 FSK	LED Retrofit Light Bar Kit - 2 Bars, 4 ft - Replaces 2'x4' Troffer	Selectable 4,750 - 7,000 Lm	Selectable 30 - 46 W	120-277V
RBK 4B4F LS70 G1 FSK	LED Retrofit Light Bar Kit - 4 Bars, 4 ft - Replaces 2'x4' Troffer	Selectable 4,750 - 7,000 Lm	Selectable 30 - 46 W	120-277V



# TDB G1

## LED Bluetooth Troffer

### Specifications



App Controlled

**5,800 Lumens Max\***

App Controlled

**3000K - 5000K CCT**

App Controlled

**45 Watts Max\***

### Controls Compatability

Motion Sensor - MSE-DCI-08  
(See page 94)Full Product  
Page  
Scan QR Code:(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)*\*Range based on series,  
individual fixtures within the  
series will differ.*

Catalog Number	Description	Lumens	Watts	Voltage
TDB 22 LS45 G1FSK	LED Troffer - 2' x 2' - Bluetooth Controls Ready	4,500 Lm Max	Controls Adjustable 35 W Max	120-277V
TDB 24 LS58 G1FSK	LED Troffer - 2' x 4' - Bluetooth Controls Ready	5,800 Lm Max	Controls Adjustable 45 W Max	120-277V



# TDSC G1

## LED Selectable Recessed Troffer

### Specifications



Switch Selectable  
**2,600 – 5,800 Lumens\***



Switch Selectable  
**3500K – 5000K CCT**



Switch Selectable  
**20 – 45 Watts\***

### Controls Compatibility



Motion Sensor - MSB-DCE-08-TL25  
(See page 93)

Motion Sensor - MS-DCE-08-TL25  
(See page 95)

Emergency Backup: EMD-SH08D-UNV-E0C08

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.

SKU SAVER  
RATING

9

Replaces up to 9 similar static luminaires.

CONTROL XP



Catalog Number	Description	Lumens	Watts	Voltage
TDSC 14 LS40 G1FSK	LED Selectable Recessed Troffer - 1'x4', Wattage Adjustable, Gen 1, CCT Selectable, White finish	Switch Selectable 2,600 – 3,750 Lm	Switch Selectable 20 – 30 W	120-277V
TDSC 22 LS40 G1FSK	LED Selectable Recessed Troffer - 2'x2', Wattage Adjustable, Gen 3, CCT Selectable, White finish	Switch Selectable 2,600 – 3,750 Lm	Switch Selectable 20 – 30 W	120V-277V
TDSC 24 LS60 G1FSK	LED Selectable Recessed Troffer - 2'x4', Wattage Adjustable, Gen 3, CCT Selectable, White finish	Switch Selectable 4,600 – 5,800 Lm	Switch Selectable 34 – 45 W	120-277V



# TDS G1

## LED Selectable Troffer

### Specifications



Switch Selectable

**2,780 - 5,670 Lumens\***

Switch Selectable

**3500K - 5000K CCT**

Switch Selectable

**20 - 45 Watts\***

### Controls Compatability

Emergency Backup.

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

\*Range based on series,  
individual fixtures within the  
series will differ.


**CONTRACTOR XP**


Catalog Number	Description	Lumens	Watts	Voltage
TDS 14 25/30/40 G1 FSK	LED Selectable Recessed Troffer - 1' x 4', White finish	Selectable 2,780 - 3,870 Lm	Selectable 20 - 30 W	120-277V
TDS 22 25/30/40 G1 FSK	LED Selectable Recessed Troffer - 2' x 2', White finish	Selectable 2,720 - 3,870 Lm	Selectable 20 - 30 W	120-277V
TDS 24 45/50/60 G1 FSK	LED Selectable Recessed Troffer - 2' x 4', White finish	Selectable 4,556 - 5,670 Lm	Selectable 34 - 45 W	120-277V





# TDRB G1

## LED Bluetooth Troffer – Retrofit Kit

### Specifications



App Controlled  
**5,800 Lumens Max\***



App Controlled  
**3000K – 5000K CCT**



App Controlled  
**45 Watts Max\***

### Controls Compatibility



Motion Sensor - MSE-DCI-08  
(See page 94)

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*

CONTROL XP



Catalog Number	Description	Lumens	Watts	Voltage
TDRB 22 LS38 G1 FSK	LED Troffer - Retrofit - 2' x 2' - Bluetooth Controls Ready	3,800 Lm Max	Controls Adjustable 30 W Max	120-277V
TDRB 24 LS58 G1 FSK	LED Troffer - Retrofit - 2' x 4' - Bluetooth Controls Ready	5,800 Lm Max	Controls Adjustable 45 W Max	120-277V



# TDRK G1

## LED Troffer - Retrofit Kit

### Specifications



Switch Selectable  
**2,700 - 5,300 Lumens\***



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**18 - 35 Watts\***

### Controls Compatibility



Motion Sensor - MSB-DCE-08-TL25  
(See page 93)

Motion Sensor - MS-DCE-08-TL25  
(See page 95)

Emergency Backup: EMD-DH08D-UNV-055

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



**9**

Replaces up to 9  
similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*



Catalog Number	Description	Lumens	Watts	Voltage
TDRK 14 LS45 G1 FSK	LED Troffer - Retrofit Kit - 1' x 4' - High Efficacy	Switch Selectable 2,700 - 4,500 Lm	Switch Selectable 18 - 30 W	120-277V
TDRK 22 LS45 G1 FSK	LED Troffer - Retrofit Kit - 2' x 2' - High Efficacy	Switch Selectable 2,700 - 4,500 Lm	Switch Selectable 18 - 30 W	120-277V
TDRK 24 LS53 G1 FSK	LED Troffer - Retrofit Kit - 2' x 4' - High Efficacy	Switch Selectable 3,800 - 5,300 Lm	Switch Selectable 25 - 35 W	120-277V





# TPB G1

## LED Bluetooth Panel

### Specifications



App Controlled  
**6,400 Lumens Max\***



App Controlled  
**3000K - 5000K CCT**



App Controlled  
**50 Watts Max\***

### Controls Compatibility



Motion Sensor - MSE-DCI-08  
(See page 94)

Emergency Backup: EL UNV-8W-PANEL

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*



CONTROL XP



Catalog Number	Description	Lumens	Watts	Voltage
TPB 22 LS38 61FSK	LED Panel - 2' x 2' - Bluetooth Controls Ready	Controls Adjustable 3,800 Lm Max	Controls Adjustable 30 W Max	120-277V
TPB 24 LS64 61FSK	LED Panel - 2' x 4' - Bluetooth Controls Ready	Controls Adjustable 6,400 Lm Max	Controls Adjustable 50 W Max	120V-277V



# TPSC G1

## LED Selectable Panel

### Specifications



Switch Selectable  
**2,750 - 5,500 Lumens\***



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**25 - 50 Watts\***

### Controls Compatibility



MSB-DCE-08-TL25 (see page 93)  
MS-DCE-08-TL25 (see page 95)

Emergency Backup: EMD-PA08D-UNV-50

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)



**9**

Replaces up to 9 similar static luminaires.

*\*Range based on series, individual fixtures within the series will differ.*



**CONTROL** XP



Catalog Number	Description	Lumens	Watts	Voltage
TPSC 14 LS45 G1 FSK	LED Selectable Backlit Panel - 1'x4' with built in 2.5 mm receptacle	Selectable 2,750 - 4,450 Lm	Selectable 25 - 40 W	120-277V
TPSC 22 LS45 G1 FSK	LED Selectable Backlit Panel - 2'x2' with built in 2.5 mm receptacle	Selectable 2,750 - 4,450 Lm	Selectable 25 - 40 W	120-277V
TPSC 24 LS55 G1 FSK	LED Selectable Backlit Panel - 2'x4' with built in 2.5 mm receptacle	Selectable 3,300 - 5,500 Lm	Selectable 30 - 50 W	120-277V





# TPS G3

## LED Selectable Backlit Panel

### Specifications



Switch Selectable  
**2,750 - 5,500 Lumens\***



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**25 - 50 Watts\***

### Controls Compatibility

Emergency Backup: EMD-PA08D-UNV-60

(For complete options, accessories, and specification details, please reference full spec sheet.)

*\*Range based on series, individual fixtures within the series will differ.*

Full Product  
Page  
Scan QR Code:



**CONTRACTOR XP**

Catalog Number	Description	Lumens	Watts	Voltage
TPS 14 LS45 G3 FSK	LED Selectable Backlit Panel* - 1'x4', Wattage Adjustable, Gen 3, CCT Selectable, White finish	Selectable 2,800 - 4,400 Lm	Selectable 25 - 40 W	120-277V
TPS 22 LS45 G3FSK	LED Selectable Panel* - 2'x2', Wattage Adjustable, Gen 3, CCT Selectable, White finish	Selectable 2,800 - 4,400 Lm	Selectable 25 - 40 W	120-277V
TPS 24 LS55 G3 FSK	LED Selectable Panel* - 2'x4', Wattage Adjustable, Gen 3, CCT Selectable, White finish	Selectable 3,300 - 5,500 Lm	Selectable 30- 50 W	120-277V

\*Also available in versions with preinstalled EMD-PA08D-UNV-060 emergency backup (120-277V).



# TSB G1

## LED Bluetooth Strip

### Specifications



App Controlled  
**9,900 Lumens Max\***



App Controlled  
**3000K - 5000K CCT**



App Controlled  
**75 Watts Max\***

### Controls Compatability



Motion Sensor - MSE-DCI-08  
(See page 94)

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

*\*Range based on series,  
individual fixtures within the  
series will differ.*



CONTROL XP



Catalog Number	Description	Lumens	Watts	Voltage
TSB 4 LS60 G1 FSK	LED Strip - 4' - Bluetooth Controls Ready	Controls Adjustable 5,900 Lm Max	Controls Adjustable 45 W Max	120-277V
TSB 8 LS100 G1 FSK	LED Strip - 8' - Bluetooth Controls Ready	Controls Adjustable 9,900 Lm Max	Controls Adjustable 75 W Max	120V-277V





CONTRACTOR XP



# TSS G1

## LED Selectable Strip

### Specifications



Switch Selectable  
**1,950 - 10,400 Lumens\***



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**15 - 80 Watts\***

### Controls Compatibility

Emergency Backup: EMD DH08D-UNV-055

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*

SKU SAVER  
RATING

9

Replaces up to 9  
similar static  
luminaires.

Catalog Number	Description	Lumens	Watts	Voltage
TSS 2 20/25/30 G1 FSK	LED Selectable Slim Industrial Strip, 2 FT, CCT Selectable, White finish	Selectable 1,950 - 3,250 Lm	Selectable 15 - 25 W	120-277V
TSS 4 30/40/50 G1 FSK	LED Selectable Slim Industrial Strip, 4 FT, CCT Selectable, White finish	Selectable 3,120 - 5,200 Lm	Selectable 24 - 40 W	120-277V
TSS 8 60/80/100 G1 FSK	LED Selectable Slim Industrial Strip, 8 FT, CCT Selectable, White finish	Selectable 6,240 - 10,400 Lm	Selectable 48 - 80 W	120-277V



# TSC Select

## LED Selectable Strip

### Specifications



Switch Selectable  
**4,488 - 11,800 Lumens\***



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**34 - 90 Watts\***

### Controls Compatibility


Emergency Backup: EMD-DH08D-UNV-055

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

*\*Range based on series,  
individual fixtures within the  
series will differ.*

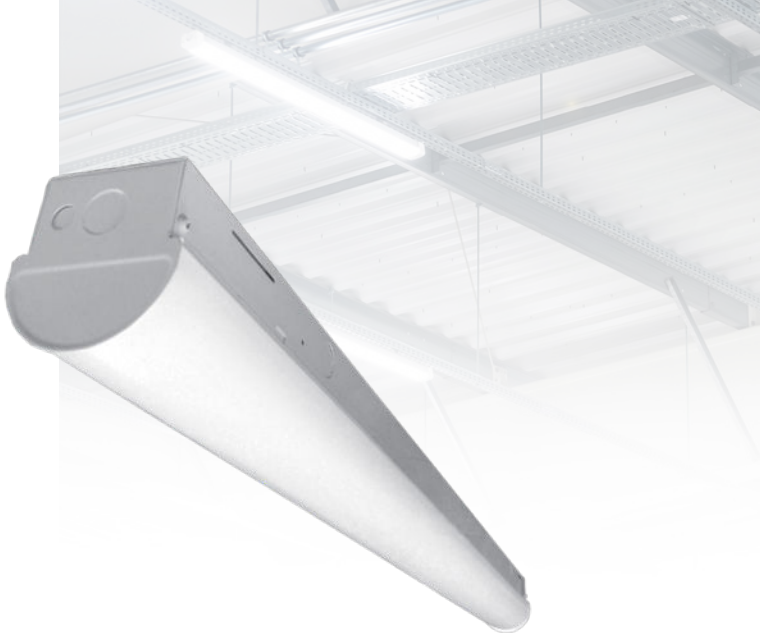

**CONTRACTOR XP**



Catalog Number	Description	Lumens	Watts	Voltage
TSC 4 45/50/60 G1 FSK	LED Selectable Industrial Strip - 4', White finish	Selectable 4,488 - 5,940 Lm	Selectable 34 - 45 W	120-277V
TSC 8 85/100/120 G1 FSK	LED Selectable Industrial Strip - 8', White finish	Selectable 8,580 - 11,800 Lm	Selectable 65 - 90 W	120V-277V





# TSRK G1

## LED Selectable Strip - Retrofit

### Specifications

-  Switch Selectable  
**3,300 - 12,000 Lumens\***
-  Switch Selectable  
**3500K - 5000K CCT**
-  Switch Selectable  
**24 - 90 Watts\***

### Controls Compatability

 **MSB-DCI-08-BH4S-BT5.0 (See page 93)**  
**MS-DCI-06-BH4S**  
**Emergency Backup: EMD-DH08D-UNV-055**

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product Page Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*

 **SKU SAVER RATING**

**9** Replaces up to 9 similar static luminaires.

-    
-   
- CONTRACTOR XP**

Catalog Number	Description	Lumens	Watts	Voltage
TSRK 4 LS62 G1 FSK	LED Strip - Retrofit Kit - 4' - Controls Flexible w/ BH4S receptacle	Selectable 3,300 - 6,200 Lm	Selectable 24 - 47 W	120V-277V
TSRK 8 LS120 G1 FSK	LED Strip - Retrofit Kit - 8' - Controls Flexible w/ BH4S receptacle	Selectable 9,000 - 12,000 Lm	Selectable 65 - 90 W	120V-277V



# VLB G2

## LED Selectable Low Bay

### Specifications

-  Switch Selectable  
**5,700 - 13,000 Lumens**
-  Switch Selectable  
**4000K - 5000K CCT**
-  Switch Selectable  
**40 - 95 Watts**

### Controls Compatability

 **MSB-ACE-04 (see page 91)**  
**MS-ACE-01 (see page 96)**  
Emergency Backup: EMD-DH08D-UNV-055

Full Product  
Page  
Scan QR Code:




(For complete options, accessories, and specification details, please reference full spec sheet.)



**8**

Replaces up to 8 similar static luminaires.

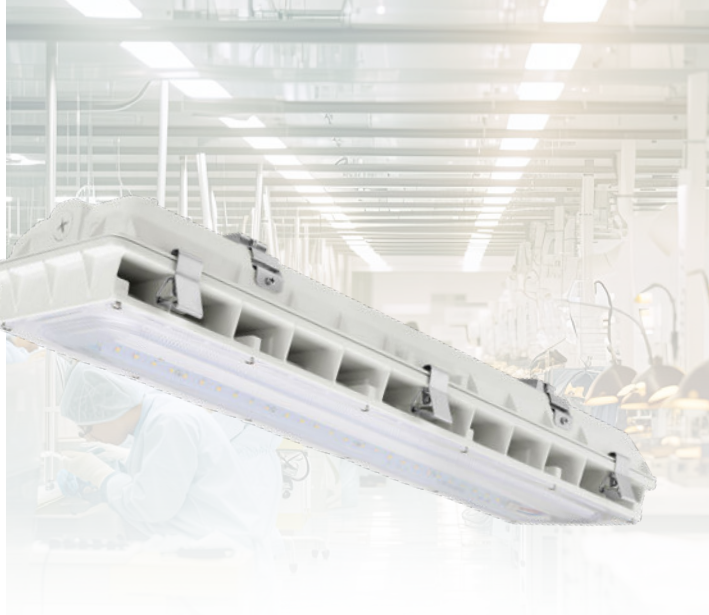

### PERFORMANCE XP



Catalog Number	Description	Lumens	Watts	Voltage
VLB 2 LS120 G2 FSK	LED Versatile Low Bay - 2 FT	Selectable 5,700 - 13,000 Lm	Selectable 40 - 95 W	120-277V



# TSF Select

## LED Selectable Stairwell



### Specifications



Switch Selectable  
**2,660 - 6,930 Lumens\***



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**20 - 55 Watts\***

### Controls Compatibility

Built in Ultra-Sonic Sensor  
Emergency Backup.

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*

**CONTRACTOR XP**



(2ft)



(4ft)



Catalog Number	Description	Lumens	Watts	Voltage
TSF 2 25/30/40 G1FSK	LED Selectable Stairwell, 2 FT, CCT Selectable, White finish	Selectable 2,660 - 3,810 Lm	Selectable 20 - 30 W	120-277V
TSF 4 45/60/70 G1FSK	LED Selectable Stairwell, 2 FT, CCT Selectable, White finish	Selectable 4,620 - 6,930 Lm	Selectable 35 - 55 W	120-277V

STAIRWELL



# TR Select

## LED Selectable Wraparound

### Specifications



Switch Selectable  
**3,800 - 5,300 Lumens**



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**28 - 40 Watts**

### Controls Compatibility

Motion Sensor - MS-ACE-01 (See page 96)

Emergency Backup - EMD-DH08D-UNV-055

Full Product  
Page  
Scan QR Code:




(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



**9**

Replaces up to 9  
similar static  
luminaires.

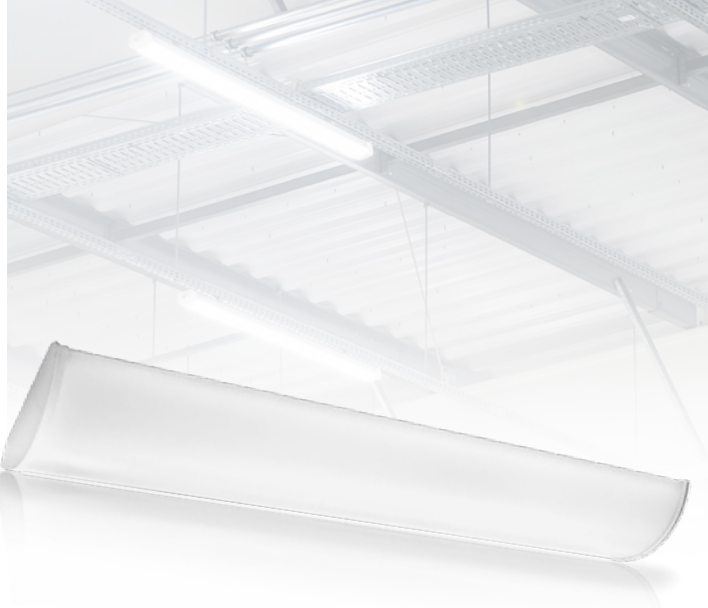

**CONTRACTOR** XP



Catalog Number	Description	Lumens	Watts	Voltage
TR 4 35/45/55 G2 FSK	LED Surface Wraparound - Second Generation	Selectable 3,800 - 5,300 Lm	Selectable 28 - 40 W	120-277V





# TRC Select

## LED Selectable Wraparound

### Specifications



Switch Selectable  
**3,950 -5,600 Lumens**



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**32 - 48 Watts**

### Controls Compatability

Motion Sensor - MS-ACE-01 (See page 96)

(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

Full Product  
Page  
Scan QR Code:



**CONTRACTOR XP**

Catalog Number	Description	Lumens	Watts	Voltage
TRC 4 40/50/55 G1 FSK	LED Selectable Surface Wraparound, 4 FT, CCT Selectable, White finish	Selectable 3,950 - 5,600 Lm	Selectable 32- 48 W	120-277V



# VTH G1

## LED Selectable Vapor Tight High Bay

### Specifications



Switch Selectable  
**16,000 - 32,000 Lumens**



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**100 - 200 Watts**

### Controls Compatability



Motion Sensor - MSB-ACE-04  
(See page 91)

### Dimensions

**47.5" x 10.5" x 4.5"**

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



**9**

Replaces up to 9  
similar static  
luminaires.



**CONTRACTOR XP**



Catalog Number	Description	Lumens	Watts	Voltage
VTH 4 LS220 G1 FSK	LED Selectable Vapor Tight High Bay - First Generation	Selectable 16,000 - 21,600 Lm	Selectable 100 - 135 W	120-277V
VTH 4 LS320 G1 FSK	LED Selectable Vapor Tight High Bay - First Generation	Selectable 24,800 - 32,000 Lm	Selectable 155 - 200 W	120-277V



# VTSC G1

## LED Vapor Tight

### Specifications

**Switch Selectable**  
**1,950 - 11,700 Lumens\***

**Switch Selectable**  
**3500K - 5000K CCT**

**Switch Selectable**  
**15 - 90 Watts\***

### Controls Compatibility

**MSB-DCE-06 (page 91)**  
**MS-DCE-09-L7 (page 95)**

Emergency Backup: EMD-SH08D-UNV-EOC08D

**Full Product  
Page  
Scan QR Code:**



*(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)*

**9**  
Replaces up to 9  
similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*



**CONTRACTOR XP**



Catalog Number	Description	Lumens	Watts	Voltage
VTSC 2 LS33 G1FSK	LED Vapor Tight Selectable Strip - 2 Foot- First Generation - UL94-5VA housing	Selectable 1,950 - 3,250 Lm	Selectable 15 - 25 W	120-277V
VTSC 4 LS60 G1FSK	LED Vapor Tight Selectable Strip - 4 Foot- First Generation - UL94-5VA housing	Selectable 3900 - 5,850 Lm	Selectable 30 - 45 W	120-277V
VTSC 8 LS120 G1FSK	LED Vapor Tight Selectable Strip - 8 Foot- First Generation - UL94-5VA housing	Selectable 7,800 - 11,700 Lm	Selectable 60 - 90 W	120-277V
VTSC 4 LS60 G1FSK - EMDSH08D-UNV-EOC0	LED Vapor Tight Selectable Strip - 4 Foot- First Generation - UL94-5VA housing with preinstalled battery backup	Selectable 3900 - 5,850 Lm	Selectable 30 - 45 W	120-277V
VTSC 8 LS120 G1FSK - EMDSH08D-UNV-EOC8	LED Vapor Tight Selectable Strip - 8 Foot- First Generation - UL94-5VA housing with preinstalled battery backup	Selectable 7,800 - 11,700 Lm	Selectable 60 - 90 W	120-277V



# VTS G1

## LED Selectable Vapor Tight Strip

### Specifications



Switch Selectable

**1,950 - 12,000 Lumens\***

Switch Selectable

**3500K - 5000K CCT**

Switch Selectable

**15 - 90 Watts\***

### Controls Compatibility



Motion Sensor.

Emergency Backup: EMD-SH08D-UNV-056

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

**9**

Replaces up to 9  
similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*

**CONTRACTOR XP**

Catalog Number	Description	Lumens	Watts	Voltage
VTS 2 LS1G1FSK	LED Vapor Tight Selectable Strip - 2 Foot- First Generation - UL94-5VA housing	Selectable 1,950 - 3,250 Lm	Selectable 15 - 25 W	120-277V
VTS 4 LS1G1FSK	LED Vapor Tight Selectable Strip - 4 Foot- First Generation - UL94-5VA housing	Selectable 4,000 - 5,900 Lm	Selectable 30 - 45 W	120-277V
VTS 8 LS1G1FSK	LED Vapor Tight Selectable Strip - 8 Foot- First Generation - UL94-5VA housing	Selectable 8,200 - 12,000 Lm	Selectable 60 - 90 W	120-277V





*Change your world... for not a lot of change.*

**DESIGN** XP

**The Design XP™ line from SLG Lighting offers modern design lighting and housing with intuitive installation and an approachable price.**

**When looks and cost matters, the Design XP™ line is your go-to source for your architectural, up-scale, and aesthetic lighting needs. Customizable options, sleek looks, and bright fulfilling LED lighting are the basis of this top selling line of LED fixtures.**



Your experience matters.



# SAL M27

## LED Selectable Slim Architectural Linear

### Specifications



Switch Selectable

**1,760 - 11,520 Lumens\***



Switch Selectable

**3000K - 4000K CCT**



Switch Selectable

**15 - 100 Watts\***

### Controls Compatibility



MSB-DCI-08-BT5.0 (Page 93)

Emergency Backup: EMD-PA08D-UNV-060

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



**45**

Replaces up to 45  
similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*



**DESIGN XP**

Catalog Number	Description	Lumens	Watts	Voltage
SAL M27 2 LS28 ID F G1 FSK W	LED Slim Architectural Linear- 2', Uplight/Downlight, Selectable CCT, White finish*	Selectable 1,760 - 2,880 Lm	Selectable 15 - 25 W	120-277V
SAL M27 4 LS55 ID F G1 FSK W	LED Slim Architectural Linear- 4', Uplight/Downlight, Selectable CCT, White finish*	Selectable 3,520 - 5,760 Lm	Selectable 30 - 50 W	120-277V
SAL M27 8 LS110 ID F G1 FSK W	LED Slim Architectural Linear- 8', Uplight/Downlight, Selectable CCT, White finish*	Selectable 7,040 - 11,520 Lm	Selectable 60 - 100 W	120-277V

\*Also available in Black.

Color tunable/Bluetooth controlled versions also available.





## SAL M27 Accessories



**Joiners**  
(L, T, and X-Joiner available  
in White & Black)




**Illuminated Joiners**  
(available in White & Black)



### Mounting Options

Drop Ceiling Suspension Kit  
Drywall Suspension Kit  
STB Suspension Kit  
Wall Mount  
Surface Mount  
Recessed Mount



### Lens Options

Parabolic Lens  
Louver Kit  
Drop Lens



### Metal Cover

**Down Metal Cover**  
(For 100% uplight)


(For complete options, accessories, and specification  
details, please reference full spec sheet.)



- 1 2ft fixture (White & Black)
- 2 4ft fixture (White & Black)
- 3 8ft fixture (White & Black)
- 4 Surface Mounting
- 5 Suspended Mounting
- 6 Selectable Up Light / Down Light Distribution
- 7 Continuous Run
- 8 Customizable Design
- 9 Recessed Mount

### Selectable Distribution

Switch  
selectable  
power

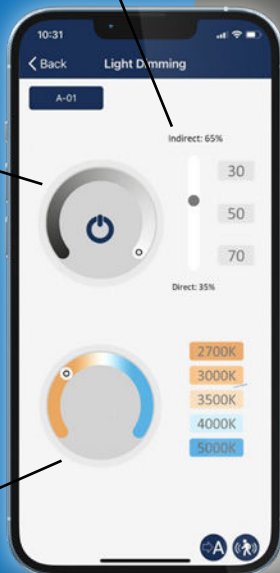


Switch selectable  
CCT

5

6



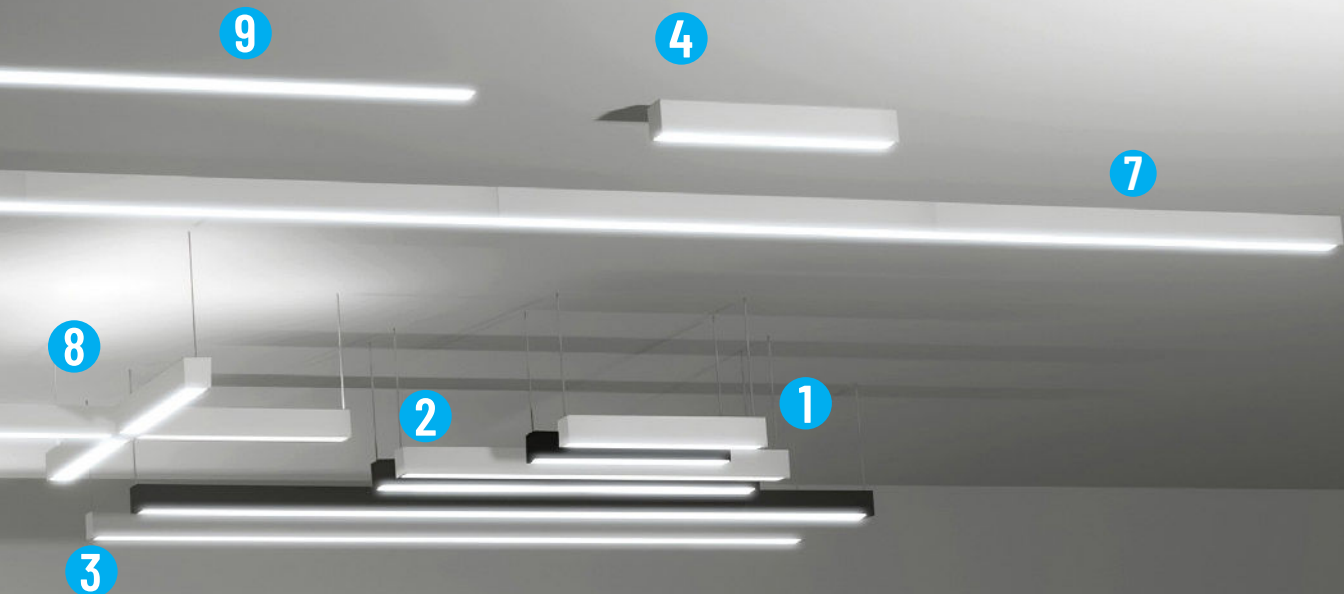

**SLG**<sup>®</sup>  
**LIGHTING**



# CLS G1

## LED Architectural Cylinder Downlight

### Specifications



Switch Selectable

**500 - 4,000 Lumens\***

Switch Selectable

**2700K - 5000K CCT**

Switch Selectable

**5 - 40 Watts\***

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

**45**




Replaces up to 45  
similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*

**DESIGN XP**

Catalog Number	Description	Lumens	Watts	Voltage
CLS 3R LS15 SD G19FSK	LED Architectural Cylinder Downlight - 3" Round - First Generation, Selectable Distribution (25° - 80°), 90CRI, Black Finish*	Selectable 500 - 1,400 Lm	Selectable 5 - 15 W	120-277V
CLS 4R LS25 SD G19FSK	LED Architectural Cylinder Downlight - 4" Round - First Generation, Selectable Distribution (30° - 60°), 90CRI, Black Finish*	Selectable 1,000 - 2,500 Lm	Selectable 10 - 25 W	120-277V
CLS 6R LS40 SD G19FSK	LED Architectural Cylinder Downlight - 6" Round - First Generation, Selectable Distribution (35° - 60°), 90CRI, Black Finish*	Selectable 2,000 - 4,000 Lm	Selectable 20 - 40 W	120-277V

### \*Available finishes:

**White****Black****Silver Grey**



# SLP G1

## LED Selectable Slot Panel

### Specifications



Switch Selectable  
**1,600 – 8,800 Lumens\***



Switch Selectable  
**3000K – 5000K CCT**



Switch Selectable  
**10 – 80 Watts\***

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*



**12**

Replaces up to 12 similar static luminaires.

DESIGN XP



Catalog Number	Description	Lumens	Watts	Voltage
SLP 2 LS22 G1 FSK	LED Selectable Slot Panel - 2' Length - First Generation	Selectable 1,600 – 2,200 Lm	Selectable 10 – 20 W	120-277V
SLP 4 LS44 G1 FSK	LED Selectable Slot Panel - 4' Length - First Generation	Selectable 2,200 – 4,400 Lm	Selectable 20 – 40 W	120-277V
SLP 8 LS88 G1 FSK	LED Selectable Slot Panel - 8' Length - First Generation	Selectable 4,400 – 8,800 Lm	Selectable 40 – 80 W	120-277V

COMMERCIAL  
ARCHITECTURAL



# TL G2

## LED Selectable Luxe Troffer

### Specifications



Switch Selectable  
**2,360 - 5,600 Lumens**



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**20 - 50 Watts**

### Controls Compatibility

Emergency Backup - EMD-DH02D-UNV-055

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



DESIGN XP



Catalog Number	Description	Lumens	Watts	Voltage
TL 22 25/35/45 G2 FSK	LED Selectable Luxe Troffer - 2' x 2' - First Generation	Selectable 2,360 - 4,480 Lm	Selectable 20 - 40 W	120-277V
TL 24 35/45/55 G2 FSK	LED Selectable Luxe Troffer - 2' x 4' - First Generation	Selectable 3,540 - 5,600 Lm	Selectable 30 - 50 W	120-277V



# TPL G2

## LED Selectable Luxe Backlit Panel

### Specifications



Switch Selectable  
**2,750 - 5,500 Lumens**



Switch Selectable  
**3500K - 5000K CCT**



Switch Selectable  
**25 - 50 Watts**

### Controls Compatibility



MSB-DCE-08-TL25 (Page 93)  
MS-DCE-08-TL25 (Page 95)

Emergency Backup: EMA-PA08D-UNV-170

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*

SKU SAVER  
RATING

9

Replaces up to 9 similar static luminaires.



DESIGN XP

Catalog Number	Description	Lumens	Watts	Voltage
TPL 14 LS38 G2 FSK	Luxe Selectable Backlit Panel 1x4, Selectable Power, Selectable CCT, 0-10V Dimming, 2.5mm Aux Sensor receptacle, White finish	Selectable 2,750 - 3,850 Lm	Selectable 25 - 35 W	120-277V
TPL 22 LS38 G2 FSK	Luxe Selectable Backlit Panel 2x2, Selectable Power, Selectable CCT, 0-10V Dimming, 2.5mm Aux Sensor receptacle, White finish	Selectable 2,750 - 3,850 Lm	Selectable 25 - 35 W	120-277V
TPL 24 LS55 G2 FSK	Luxe Selectable Backlit Panel 2x4, Selectable Power, Selectable CCT, 0-10V Dimming, 2.5mm Aux Sensor receptacle, White finish	Selectable 3,300 - 5,500 Lm	Selectable 30 - 50 W	120-277V



# TG G1

## LED T-Grid Linear Light

### Specifications

 **1,300 - 2,600 Lumens\***

 **3500K - 4000K CCT\***

 **10 - 20 Watts\***

### Controls Compatibility

Emergency Backup: EMA-DH80D-UNV-170

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)

*\*Range based on series, individual fixtures within the series will differ.*



DESIGN XP



Catalog Number	Description	Lumens	Watts	Voltage
TG 2 13 N G1 35K	LED T-Grid Linear Light - 2ft, Finline Ceiling*, 3500K CCT*, White finish	1,300 Lm	10 W	120-277V
TG 4 13 N G1 35K	LED T-Grid Linear Light - 4ft, Finline Ceiling*, 3500K CCT*, White finish	2,600 Lm	20 W	120-277V
TG 2 30W	Driver (Up to 3 TG 2ft luminaries)		30 W	120-277V
TG 4 60W	Driver (Up to 3 TG 4ft luminaries)		60 W	120-277V

\*Also available in 4000K CCT and Standard Ceiling options.

DRIVER



Each driver supports up to 3 fixtures.



Emergency Backup Emergency Backup Emergency Backup

3 8W Emergency Backup Ports



# SCL G1

## LED Slim Cove Light

### Specifications



**350 - 1,550 Lumens\***



**2700K - 5000K CCT\***



**4 - 16 Watts\***

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.

DESIGN XP



TRIAC Dimming

Catalog Number	Description	Lumens	Watts	Voltage
SCL 1 4 G1 27K	LED Slim Cove Light - 1', 2700K CCT*, White finish	350 Lm	4 W	120V
SCL 2 8 G1 27K	LED Slim Cove Light - 2', 2700K CCT*, White finish	750 Lm	8 W	120V
SCL 3 12 G1 27K	LED Slim Cove Light - 3', 2700K CCT*, White finish	1,150 Lm	13 W	120V
SCL 4 16 G1 27K	LED Slim Cove Light - 4', 2700K CCT*, White finish	1,550 Lm	16 W	120V

\*Also available in 3000K, 3500K, 4000K, and 5000K CCT.

### ACCESSORIES



Wiring Cable  
SCL-WC

Available in 7" length



Extension Cable  
SCL-EC

Available in 6", 12", 24", 36", and 70" lengths



Power Cable  
SCL-PC

Available in 48" length



# SERENITY

## LED Suspended, Architectural Pendant Light

### Specifications



Switch Selectable  
**1,500 - 10,000 Lumens\***



Switch Selectable  
**3000K - 4000K CCT**



Switch Selectable  
**15 - 100 Watts\***

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



**9**

Replaces up to 9  
similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*



DESIGN XP



Catalog Number	Description	Lumens	CCT	Watts	Voltage
SSD 2 LS25 G2 FSK W	LED Suspending Up/Down Light, 8 ft, Gen 1, White finish	Selectable 1,500 - 2,500 Lm	Selectable 3000K - 4000K	Selectable 15 - 25 W	120-277V
SSD 4 LS50 G2 FSK W	LED Suspended Up/Down Light, 4 ft, Gen 1, White finish	Selectable 3,000 - 5,000 Lm	Selectable 3000K - 4000K	Selectable 30 - 50 W	120-277V
SSD 8 LS100 G2 FSK W	LED Suspending Up/Down Light, 8 ft, Gen 1, White finish	Selectable 6,000 - 10,000 Lm	Selectable 3000K - 4000K	Selectable 60 - 100 W	120-277V



# FIREFLY

## LED Slim Architectural Wall Light



DESIGN XP



### Specifications



Switch Selectable  
**750 - 3,000 Lumens\***



Switch Selectable  
**3000K - 4000K CCT**



Switch Selectable  
**7.5 - 30 Watts\***

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*



Replaces up to 9 similar static luminaires.

Catalog Number	Description	Lumens	CCT	Watts	Voltage
SWL 1LS15 F G1FSK B	LED Architectural Wall Light, 1 ft, Gen 1, Black finish	Selectable 750 - 1,500 Lm	Selectable 3000K - 4000K	Selectable 7.5 - 15 W	120-277V
SWL 2LS50 F G1FSK B	LED Architectural Wall Light, 2 ft, Gen 1, Black finish	Selectable 2,000 - 3,000 Lm	Selectable 3000K - 4000K	Selectable 20 - 30 W	120-277V
SWL 1LS15 F G1FSK W	LED Architectural Wall Light, 1 ft, Gen 1, White finish	Selectable 750 - 1,500 Lm	Selectable 3000K - 4000K	Selectable 7.5 - 15 W	120-277V
SWL 2LS50 F G1FSK W	LED Architectural Wall Light, 1 ft, Gen 1, White finish	Selectable 2,000 - 3,000 Lm	Selectable 3000K - 4000K	Selectable 20 - 30 W	120-277V



# DEP G2

## LED Selectable Downlights

### Specifications

 Switch Selectable  
**750 - 6,000 Lumens\***

 Switch Selectable  
**2700K - 5000K CCT\***

 Switch Selectable  
**10 - 60 Watts\***

### Controls Compatibility

Emergency Backup: EMA-DH90D-UNV-145

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)

*\*Range based on series, individual fixtures within the series will differ.*



PERFORMANCE XP



Catalog Number	Description	Lumens	Watts	Voltage
DEP LS15 SD G2 9FSK	LED Commercial Downlight, Gen 2, Power Selectable, 24°-45° Adjustable Beam Angle, Selectable CCT	Selectable 750 - 1,500 Lm	Selectable 10 - 20 W	120-277V
DEP LS21 SD G2 9FSK	LED Commercial Downlight, Gen 2, Power Selectable, 24°-45° Adjustable Beam Angle, Selectable CCT	Selectable 1,500 - 2,100 Lm	Selectable 20 - 30 W	120-277V
DEP LS35 SD G2 9FSK	LED Commercial Downlight, Gen 2, Power Selectable, 35°-55° Adjustable Beam Angle, Selectable CCT	Selectable 2,400 - 3,500 Lm	Selectable 30 - 50 W	120-277V
DEP LS60 SD G2 935K	LED Commercial Downlight, Gen 2, Power Selectable, 35°-55° Adjustable Beam Angle, 3500K CCT	Selectable 4,000 - 6,000 Lm	Selectable 40 - 60 W	120-277V
DEP LS60 SD G2 940K	LED Commercial Downlight, Gen 2, Power Selectable, 35°-55° Adjustable Beam Angle, 4000K CCT	Selectable 4,000 - 6,000 Lm	Selectable 40 - 60 W	120-277V



PERFORMANCE XP

# Professional Grade

## DEP G2

### Spectrum of Trim

*In addition to there being a many sizes and shapes for trim, each one can be easily swapped out with its twist lock mechanism!*



Optics Selectable  
35° - 55° & More!





# DRW G1

## LED Regress Wafer Downlight

### Specifications

- 

Switch Selectable  
**650 - 2,500 Lumens\***
- 

Switch Selectable  
**2700K - 5000K CCT**
- 

Switch Selectable  
**6 - 30 Watts\***

### Controls Compatability

Emergency Backup: EMA-DH09D-UNV-145

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

SKU SAVER  
RATING

15

Replaces up to 15  
similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*



DESIGN XP



Catalog Number	Description	Lumens	Watts	Voltage
DRW 4R LS11 G1 9FSK	4" Round LED Regress Wafer Downlight - 90° Beam Angle - 90 CRI	Selectable 650 - 1,100 Lumens	Selectable 6 - 12 W	120-277V
DRW 6R LS20 G1 9FSK	6" Round LED Regress Wafer Downlight - 90° Beam Angle - 90 CRI	Selectable 1,100 - 1,950 Lumens	Selectable 12 - 24 W	120-277V
DRW 8R LS25 G1 9FSK	8" Round LED Regress Wafer Downlight - 90° Beam Angle - 90 CRI	Selectable 1,500 - 2,500 Lumens	Selectable 16 - 30 W	120-277V



# DRS G3

## LED Selectable Retrofit Downlight



**CONTRACTOR XP**



10" Round  
not IC  
Rated.

### Specifications



Switch Selectable  
**600 - 3,500 Lumens\***



Switch Selectable  
**2700K - 5000K CCT**



Switch Selectable  
**6 - 36 Watts\***

### Controls Compatibility

Emergency Backup: EMA-DH09D-UNV-145

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.

SKU SAVER  
RATING

**15**

Replaces up to 15 similar static luminaires.

Catalog Number	Description	Lumens	Watts	Voltage
DRS 4R LS12 G3 FSK	LED Selectable Downlight - 4" Round - White Trim	Selectable 600 - 1,200 Lm	Selectable 6 - 12 W	120-277V
DRS 6R LS15 G3 FSK	LED Selectable Downlight - 6" Round - White Trim	Selectable 750 - 1,500 Lm	Selectable 7 - 15 W	120-277V
DRS 8R LS25 G3 FSK	LED Selectable Downlight - 8" Round - White Trim	Selectable 1,100 - 2,500 Lm	Selectable 10 - 25 W	120-277V
DRS 10R LS36 G3 FSK	LED Selectable Downlight - 10" Round - White Trim	Selectable 2,000 - 3,500 Lm	Selectable 20 - 36 W	120-277V
DRS 4S LS12 G3 FSK	LED Selectable Downlight - 4" Square - White Trim	Selectable 600 - 1,200 Lm	Selectable 6 - 12 W	120-277V
DRS 6S LS15 G3 FSK	LED Selectable Downlight - 6" Square - White Trim	Selectable 750 - 1,500 Lm	Selectable 7 - 15 W	120-277V



# DRC G1

## LED Commercial Downlight

### Specifications

- **600 - 4,000 Lumens\***  
Switch Selectable
- **2700K - 5000K CCT**
- **9 - 18 Watts\***

### Controls Compatability

Emergency Backup: EMA-DH08D-UNV-170  
DRC-(4, 6, 8, 10)R-EM-PACK  
(Must be ordered with EMA-DH08D-UNV-170)

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

SKU SAVER  
RATING

5

Replaces up to 5  
similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*



CONTRACTOR XP



Catalog Number	Description	Lumens	Watts	Voltage
DRC 4R LS10 G19FSK TAA	LED Commercial Retrofit Downlight - 4" Round - White Trim	Selectable 600 - 1,000 Lm	Selectable 7 - 12 W	120-277V
DRC 6R LS10 G19FSK TAA	LED Commercial Retrofit Downlight - 6" Round - White Trim	Selectable 500 - 900 Lm	Selectable 7 - 11 W	120-277V
DRC 6R LS20 G19FSK TAA	LED Commercial Retrofit Downlight - 6" Round - White Trim	Selectable 1,100 - 2,000 Lm	Selectable 14 - 24 W	120-277V
DRC 8R LS33 G19FSK TAA	LED Commercial Retrofit Downlight - 8" Round - White Trim	Selectable 2,400 - 3,300 Lm	Selectable 25 - 35 W	120-277V
DRC 10R LS40 G19FSK TAA	LED Commercial Retrofit Downlight - 10" Round - White Trim	Selectable 3,000 - 4,000 Lm	Selectable 32 - 43 W	120-277V



# DSD G1

## LED Selectable Surface Mount Downlight

### Specifications



Switch Selectable  
**550 - 1,000 Lumens**



Switch Selectable  
**2700K - 5000K CCT**



Switch Selectable  
**6 - 13 Watts**

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



SKU SAVER  
RATING

**15**

Replaces up to 15  
similar static  
luminaires.

DESIGN XP



Catalog Number	Description	Lumens	Watts	Voltage
DSD 5R LS10 G19FSK T	5" Round LED Surface Mount Downlight - 90 CRI TRIAC/ELV Dimming	Selectable 550 - 950 Lm	Selectable 6 - 13 W	120V
DSD 5R LS10 G19FSK D	5" Round LED Surface Mount Downlight - 90 CRI 0-10V Dimming	Selectable 550 - 1,000 Lm	Selectable 6 - 13 W	120-277V

MULTI-FAMILY /  
RESIDENTIAL DOWNLIGHTS



# DS G2

## LED SurfaceSlice Downlight

### Specifications

-  Switch Selectable  
**650 - 1,350 Lumens\***
-  Switch Selectable  
**2700K - 5000K CCT**
-  Switch Selectable  
**7 - 15 Watts\***

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)



**15** Replaces up to 15 similar static luminaires.

*\*Range based on series, individual fixtures within the series will differ.*



DESIGN XP



Catalog Number	Description	Lumens	Watts	Voltage
DS 5R LS10 G2 9FSK	DS Surface Slice Downlight, 51N Round, 120VAC, Gen2, CRI 90, Field Selectable CCT, Triac Dimming, White Rim	Selectable 650 - 1,000 Lm	Selectable 7 - 13 W	120V
DS 7R LS14 G2 9FSK	DS Surface Slice Downlight, 71N Round, 120VAC, Gen2, CRI 90, Field Selectable CCT, Triac Dimming, White Rim	Selectable 800 - 1,350 Lm	Selectable 8 - 15 W	120V
DS 5R LS10 G2 UNV 9FSK	DS Surface Slice Downlight, 51N Round, 120-277VAC, Gen2, CRI 90, Field Selectable CCT, 0-10V Dimming, White Rim	Selectable 650 - 1,000 Lm	Selectable 7 - 13 W	120-277V
DS 7R LS14 G2 UNV 9FSK	DS Surface Slice Downlight, 71N Round, 120-277VAC, Gen2, CRI 90, Field Selectable CCT, 0-10V Dimming, White Rim	Selectable 800 - 1,350 Lm	Selectable 8 - 15 W	120-277V



DF G2

LED Ultra-Thin Recessed Downlight



Specifications

 **650 - 1,500 Lumens\***  
Switch Selectable

 **2700K - 5000K CCT**

 **9 - 18 Watts\***

(For complete options, accessories, and specification details, please reference full spec sheet.)

*\*Range based on series, individual fixtures within the series will differ.*

Full Product Page Scan QR Code:



 **5** Replaces up to 5 similar static luminaires.

Catalog Number	Description	Lumens	Watts	Voltage
DF 4R 7 G2 9FSK	LED Recessed Downlight, Gen 2, 4in Round, 9 Watt, 650 Lumens, Selectable CCT, 90 CRI, 120VAC, Triac Dimming, White Rim	650 Lm	9 W	120V
DF 6R 9 G2 9FSK	LED Recessed Downlight, Gen 2, 6in Round, 12 Watt, 900 Lumens, Selectable CCT, 90 CRI, 120VAC, Triac Dimming, White Rim	900 Lm	12 W	120V
DF 8R 15 G2 9FSK	LED Recessed Downlight, Gen 2, 8in Round, 18 Watt, 1,500 Lumens, Selectable CCT, 90 CRI, 120VAC, Triac Dimming, White Rim	1,500 Lm	18 W	120V
DF 4S 7 G2 9FSK	LED Recessed Downlight, Gen 2, 4in Square, 9 Watt, 600 Lumens, Selectable CCT, 90 CRI, 120VAC, Triac Dimming, White Rim	600 Lm	9 W	120V
DF 6S 9 G2 9FSK	LED Recessed Downlight, Gen 2, 6in Square, 12 Watt, 850 Lumens, Selectable CCT, 90 CRI, 120VAC, Triac Dimming, White Rim	850 Lm	12 W	120V

MULTI-FAMILY /  
RESIDENTIAL DOWNLIGHTS



# DGD G1

## LED Downlight-Gimbal Direct

SWIFTY  
360° LED DOWNLIGHTS

### Specifications



**400 - 1,050 Lumens\***

Switch Selectable



**2700K - 5000K CCT**



**6 - 15 Watts\***

### Controls Compatability

Emergency Backup: EMA-DH20T-UNV-110

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)

\*Range based on series, individual fixtures within the series will differ.



360° Rotation



30° Tilt



DESIGN XP



90 CRI

Catalog Number	Description	Lumens	Watts	Voltage
DGD 2R 4 D38 G1 9FSK	2" Round LED Direct Gimbal Downlight - 38° Beam Angle - 90 CRI	400 Lm	6 W	120V
DGD 2R 4 D20 G1 9FSK	2" Round LED Direct Gimbal Downlight - 20° Beam Angle - 90 CRI	400 Lm	6 W	120V
DGD 3R 6 D38 G1 9FSK	3" Round LED Direct Gimbal Downlight - 38° Beam Angle - 90 CRI	600 Lm	9 W	120V
DGD 4R 10 D38 G1 9FSK	4" Round LED Direct Gimbal Downlight - 38° Beam Angle - 90 CRI	1050 Lm	15 W	120V





# DGR G1

## LED Downlight-Gimbal Regress

### Specifications



**400 - 1,050 Lumens\***

Switch Selectable



**2700K - 5000K CCT**



**6 - 15 Watts\***

### Controls Compatability

Emergency Backup: EMA-DH20T-UNV-110

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.

360° Rotation



30° Tilt



DESIGN XP



Catalog Number	Description	Lumens	Watts	Voltage
DGR 2R 4 D38 G19FSK	2" Round LED Regress Gimbal Downlight - 38° Beam Angle - 90 CRI	400 Lm	6 W	120V
DGR 2R 4 D20 G19FSK	2" Round LED Regress Gimbal Downlight - 20° Beam Angle - 90 CRI	400 Lm	6 W	120V
DGR 3R 6 D38 G19FSK	3" Round LED Regress Gimbal Downlight - 38° Beam Angle - 90 CRI	600 Lm	9 W	120V
DGR 4R 10 D38 G19FSK	4" Round LED Regress Gimbal Downlight - 38° Beam Angle - 90 CRI	1050 Lm	15 W	120V



DGS G1

SWIFTY

LED DOWNLIGHTS

LED Downlight – Gimbal Swivel

Specifications

- 900 Lumens
- Switch Selectable  
2700K - 5000K CCT
- 12 Watts

Controls Compatability

Emergency Backup: EMA-DH20T-UNV-110

Full Product  
Page  
Scan QR Code:

(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

180° Rotation

90° Tilt

DESIGN XP

TITLE 24  
JAB

TITLE 20

ENERGY STAR

ETL US

FC

5

CCT  
SELECT

Catalog Number	Description	Lumens	Watts	Voltage
DGS 4R 9 D38 G1 9FSK	4" Round LED Swivel Gimbal Downlight - 38° Beam Angle - 90 CRI	900 Lm	12 W	120V



## LED Downlight - Gimbal Wafer

### Specifications



**750 - 1,000 Lumens\***



Switch Selectable  
**2700K - 5000K CCT**



**10 - 13 Watts\***

### Controls Compatability

Emergency Backup: EMA-DH20T-UNV-110

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.

180° Rotation



30° Tilt



DESIGN XP



Catalog Number

Description

Lumens

Watts

Voltage

DGW 4R 8 G19FSK

4" Round LED Wafer Gimbal Downlight - 110° Beam Angle

750 Lm

10 W

120V

DGW 6R 10 G19FSK

6" Round LED Wafer Gimbal Downlight - 110° Beam Angle

1,000 Lm

13 W

120V



DRF G1

SWIFTY

LED DOWNLIGHTS

# LED Downlight-Regress

## Specifications

- 650 - 1,050 Lumens
- Switch Selectable  
2700K - 5000K CCT
- 9 - 15 Watts

## Controls Compatability

Emergency Backup: EMA-DH20T-UNV-110

Full Product  
Page  
Scan QR Code:

(For complete options, accessories, and specification details, please reference full spec sheet.)



DESIGN XP



Catalog Number	Description	Lumens	Watts	Voltage
DRF 3BR 7 D38 G1 9FSK	3" Round LED Regress Downlight - Baffle - 38° Beam Angle - 90 CRI	650 Lm	9 W	120V
DRF 3BR 10 D38 G1 9FSK	3" Round LED Regress Downlight - Baffle - 38° Beam Angle - 90 CRI	1050 Lm	15 W	120V
DRF 3BS 7 D38 G1 9FSK	3" Square LED Regress Downlight - Baffle - 38° Beam Angle - 90 CRI	650 Lm	9 W	120V
DRF 3BS 10 D38 G1 9FSK	3" Square LED Regress Downlight - Baffle - 38° Beam Angle - 90 CRI	1050 Lm	15 W	120V
DRF 3SR 7 D38 G1 9FSK	3" Round LED Regress Downlight - Smooth - 38° Beam Angle - 90 CRI	650 Lm	9 W	120V
DRF 3SR 10 D38 G1 9FSK	3" Round LED Regress Downlight - Smooth - 38° Beam Angle - 90 CRI	1050 Lm	15 W	120V



# NEW STOCK GUIDE!

SLG Lighting's line of downlights, ever expanding, can now be perused in its own customized stock guide!

**DESIGN DWG G1**  
LED General Purpose Downlight  
Cinema, Dynamic, Fun

**CONTRACTOR DRS G3**  
LED General Purpose Downlight  
Retrofit, New Construction, Simple

**DOWNLIGHTS STOCK GUIDE 2024**  
**SLG LIGHTING**

**DP G2**  
Retrofit

**DSD G1**  
Surface Mount

**DS G2**

**DF G2**

Scan the QR code for the spec sheet.

Scan the QR code for the spec sheet.

Scan the QR code for the spec sheet.

Scan the QR  
code to check  
it out!





# EXTERIOR LUMINAIRES

60 **Area Lights**

65 **Flood lights**

69 **Landscape**


71 **Wall Packs**

78 **Canopy**

80 **Garage**

83 **Temporary Lighting**

85 **Sports Lighting**

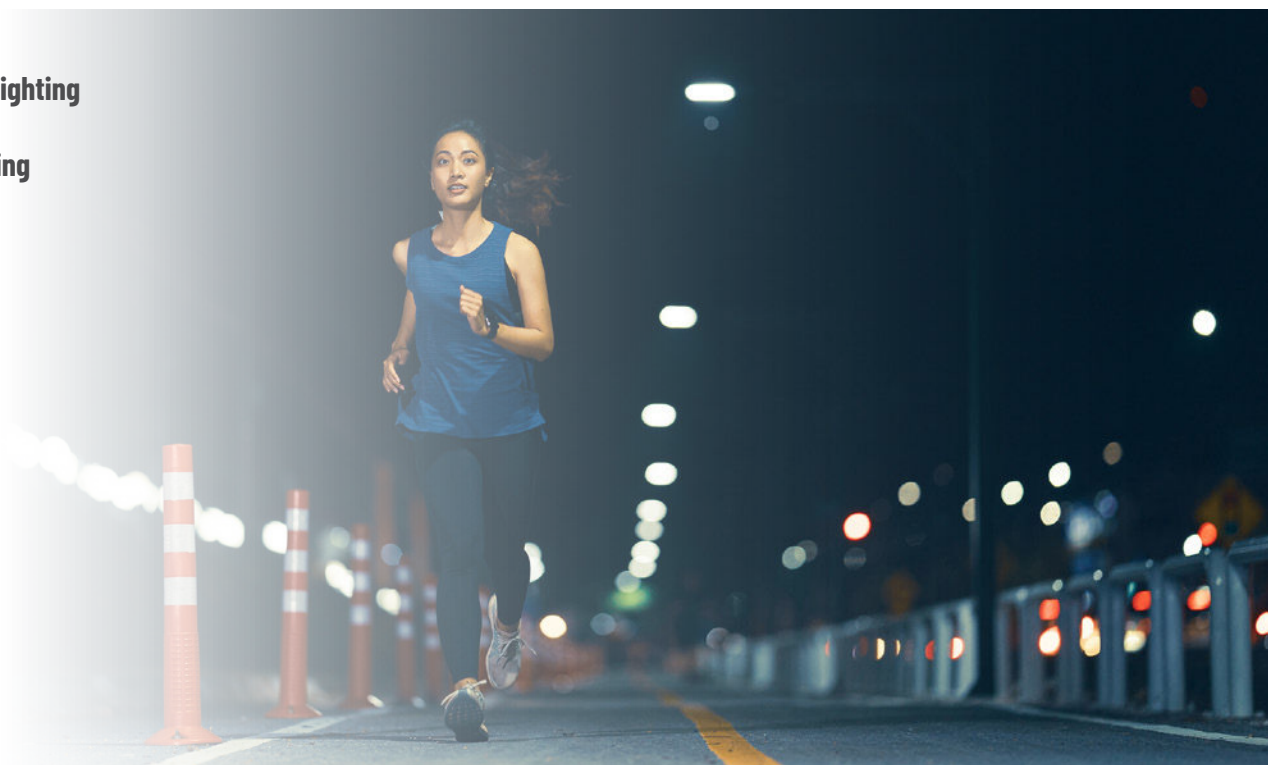



# ALW G2

## LED Selectable Area Light

### Specifications



Switch Selectable  
**6,370 - 43,000 Lumens\***



Switch Selectable  
**4000K - 5000K CCT**



Switch Selectable  
**40 - 300 Watts\***

### Controls Compatibility

Optional Photocell.

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



SKU SAVER  
RATING

**8**

Replaces up to 8  
similar static  
luminaires.

\*Range based on series,  
individual fixtures within the  
series will differ.



PERFORMANCE XP

Catalog Number	Description	Lumens	Watts	Voltage
ALW LS210 T3 G2 FSK	LED Selectable Area Light - Medium Size - Type III Distribution* - Dark Bronze**	Selectable 6,370 - 21,000 Lm	Selectable 40 - 150 W	120-277V
ALW LS210 T3 G2 HVU FSK	LED Selectable Area Light - Medium Size - Type III Distribution* - Dark Bronze** - High Voltage	Selectable 6,370 - 21,000 Lm	Selectable 40 - 150 W	347 - 480 V
ALW LS430 T3 G2 FSK	LED Selectable Area Light - Large Size - Type III Distribution* - Dark Bronze**	Selectable 24,000 - 43,000 Lm	Selectable 150 - 300 W	120-277V
ALW LS430 T3 G2 HVU FSK	LED Selectable Area Light - Large Size - Type III Distribution* - Dark Bronze** - High Voltage	Selectable 24,000 - 43,000 Lm	Selectable 150 - 300 W	347 - 480 V

\*Also available in Type VI, and Type V distribution. \*\*Also available in Black, White, and Custom colors.



# Pick your color

Available in Dark Bronze, Black, White, and Silver.



# Selectable Power & CCT

Your lighting, your way. Multiple mounting heights and applications all in one LED Area Light.

# All in ONE Stocking Solution

# Dark Night Friendly

Options to reduce light pollution without compromising safety.





# ALF G1

## LED Selectable Area Light

### Specifications



Switch Selectable  
**10,000 - 60,500 Lumens\***



Switch Selectable  
**3000K - 5000K CCT\***



Switch Selectable  
**60 - 400 Watts\***

### Controls Compatibility



MSB-DCE-06-W (Page 91)  
MSB-DCE-06-W-BT5.0  
FCB-DCE-02-W (Page 97)  
MS-DCE-09-W (Page 95)

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.

SKU SAVER  
RATING

**24**

Replaces up to  
24 similar static  
luminaires.



**CONTRACTOR XP**

Catalog Number	Description	Lumens	Watts	Voltage	Mount
ALF LS230 T3 G1 FSK PSC ASR	ALF Flexible Area Light - 4 Level Wattage Adjustable, T3*, Gen1, With 3 Pin Photocell & Shorting Cap, Dark Bronze**	Selectable 10,000 - 23,000 Lm	Selectable 60 - 140W	120-277V §	Included Adjustable Pole Mount
ALF LS230 T3 G1 FSK PSC SFD	ALF Flexible Area Light - 4 Level Wattage Adjustable, T3*, Gen1, With 3 Pin Photocell & Shorting Cap, Dark Bronze**	Selectable 10,000 - 23,000 Lm	Selectable 60 - 140W	120-277V §	Included Slipfitter Mount
ALF LS450 T3 G1 FSK PSC ASR	ALF Flexible Area Light - 4 Level Wattage Adjustable, T3*, Gen1, With 3 Pin Photocell & Shorting Cap, Dark Bronze**	Selectable 20,000 - 45,000 Lm	Selectable 120 - 300W	120-277V §	Included Adjustable Pole Mount
ALF LS450 T3 G1 FSK PSC ASR	ALF Flexible Area Light - 4 Level Wattage Adjustable, T3*, Gen1, With 3 Pin Photocell & Shorting Cap, Dark Bronze**	Selectable 20,000 - 45,000 Lm	Selectable 120 - 300W	120-277V §	Included Adjustable Pole Mount
ALF LS600 T3 G1 FSK PSC ASR	ALF Flexible Area Light - 4 Level Wattage Adjustable, T3*, Gen1, With 3 Pin Photocell & Shorting Cap, Selectable CCT***, Dark Bronze**	Selectable 47,000 - 60,500 Lm	Selectable 300 - 400W	120-277V §	Included Adjustable Pole Mount
ALF LS600 T3 G1 FSK PSC SFD	ALF Flexible Area Light - 4 Level Wattage Adjustable, Gen1, With 3 Pin Photocell & Shorting Cap, Selectable CCT***, Dark Bronze**	Selectable 47,000 - 60,500 Lm	Selectable 300 - 400W	120-277V §	Included Slipfitter Mount

\*Type II, Type IV, and Type V distributions also available. \*\*Also available in Silver, White, and custom color. \*\*\*LS600 is 4000K-5000K Selectable CCT.

§ HVU versions also available, but do not ship with a PIN receptacle, photocell, shorting cap or ASR mount.



# UDD G3

## LED Dusk To Dawn

### Specifications



Dedicated  
**6,200 - 12,200 Lumens\***



Dedicated  
**4000K - 5000K CCT\***



Dedicated  
**45 - 90 Watts\***

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

*\*Range based on series,  
individual fixtures within the  
series will differ.*



PERFORMANCE XP



Catalog Number	Description	Lumens	Watts	Voltage
UDD 65 G3 4K	LED Dusk to Dawn Area Light, 4K CCT, Dark Bronze finish*, Gen 3	6,150 Lm	45 W	120-277V
UDD 65 G3 5K	LED Dusk to Dawn Area Light, 5K CCT, Dark Bronze finish*, Gen 3	6,200 Lm	45 W	120V-277V
UDD 90 G3 4K	LED Dusk to Dawn Area Light, 4K CCT, Dark Bronze finish*, Gen 3	8,650 Lm	65 W	120-277V
UDD 90 G3 5K	LED Dusk to Dawn Area Light, 5K CCT, Dark Bronze finish*, Gen 3	8,800 Lm	65 W	120-277V
UDD 125 G3 4K	LED Dusk to Dawn Area Light, 4K CCT, Dark Bronze finish*, Gen 3	12,200 Lm	90 W	120-277V
UDD 125 G3 5K	LED Dusk to Dawn Area Light, 5K CCT, Dark Bronze finish*, Gen 3	12,200 Lm	90 W	120-277V

*\*Also available in silver and custom colors.*



# 1.2 MILLION SQUARE FEET

## CASE STUDY

*Witness the might of 1.2 million square feet and the 1,300+ fixtures it takes to light it all!*

## FEATURING:

HIGH BAYS  
AREA LIGHTS  
WALL PACKS



**WATCH NOW!!**

Youtube  
video!!!





# FLF G1

## LED Flood Light - Flex Series

### Specifications



Switch Selectable

**10,000 - 60,000 Lumens\***

Switch Selectable

**3000K - 5000K CCT\***

Switch Selectable

**60 - 400 Watts\***

### Controls Compatibility



MSB-DCE-06-W (Page 91)

FCB-DCE-02-W (Page 97)

Ships with Photocell.

MS-DCE-09-L7-W (Page 95)

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

**24**

Replaces up to  
24 similar static  
luminaires.

\*Range based on series,  
individual fixtures within the  
series will differ.


**CONTRACTOR XP**


Catalog Number	Description	Lumens	Watts	Voltage	Mount
FLF LS230 N77 G1 FSK PSC T	FLF Flexible Flood Light - 4 Level Wattage Adjustable, N77, Gen1, With 3 Pin Photocell & Shorting Cap, Dark Bronze*	Selectable 10,000 - 23,000 Lm	Selectable 60 - 140W	120-277V §	Included Trunnion Mount
FLF LS230 N77 G1 FSK PSC SFD	FLF Flexible Flood Light - 4 Level Wattage Adjustable, N77, Gen1, With 3 Pin Photocell & Shorting Cap, Dark Bronze*	Selectable 10,000 - 23,000 Lm	Selectable 60 - 140W	120-277V §	Included Slipfitter Mount
FLF LS450 N77 G1 FSK PSC T	FLF Flexible Flood Light - 4 Level Wattage Adjustable, N77, Gen1, With 3 Pin Photocell & Shorting Cap, Dark Bronze*	Selectable 20,000 - 45,000 Lm	Selectable 120 - 300W	120-277V §	Included Trunnion Mount
FLF LS450 N77 G1 FSK PSC SFD	FLF Flexible Flood Light - 4 Level Wattage Adjustable, N77, Gen1, With 3 Pin Photocell & Shorting Cap, Dark Bronze*	Selectable 20,000 - 45,000 Lm	Selectable 120 - 300W	120-277V §	Included Adjustable Pole Mount
FLF LS600 N77 G1 FSK PSC T	FLF Flexible Flood Light - 4 Level Wattage Adjustable, N77, Gen1, With 3 Pin Photocell & Shorting Cap, Selectable CCT**, Dark Bronze*	Selectable 47,000 - 60,500 Lm	Selectable 300 - 400W	120-277V §	Included Trunnion Mount
FLF LS600 N77 G1 FSK PSC SFD	FLF Flexible Flood Light - 4 Level Wattage Adjustable, N77, Gen1, With 3 Pin Photocell & Shorting Cap, Selectable CCT**, Dark Bronze*	Selectable 47,000 - 60,500 Lm	Selectable 300 - 400W	120-277V §	Included Slipfitter Mount

\*Also available in Silver, White, and custom color. \*\*LS600 is 4000K-5000K Selectable CCT. § HVU versions also available, but do not ship with a PIN receptacle, photocell, shorting cap or ASR mount.



# FSS G1

## LED Selectable Flood Light

### Specifications



Switch Selectable  
**1,600 - 18,000 Lumens\***



Switch Selectable  
**3000K - 5000K CCT**



Switch Selectable  
**11 - 123 Watts\***

### Controls Compatibility

Built in Photocell.

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.



**CONTRACTOR XP**

Catalog Number	Description	Lumens	Watts	Voltage
FSS LS1 G1 FSK	LED Flood light - Small - 1/2" Knuckle Mount	Selectable 1,600 - 3,600 Lm	Selectable 11 - 27 W	120-277V
FSS LS1 G1 FSK T	LED Flood light - Small - Trunnion Mount	Selectable 1,600 - 3,600 Lm	Selectable 11 - 27 W	120V-277V
FSS LS2 G1 FSK	LED Flood light - Medium - 1/2" Knuckle Mount	Selectable 3,900 - 9,400 Lm	Selectable 28 - 66 W	120-277V
FSS LS2 G1 FSK T	LED Flood light -Medium - Trunnion Mount	Selectable 3,900 - 9,400 Lm	Selectable 28 - 66 W	120-277V
FSS LS3 G1 FSK S	LED Flood light - Large - Slipfitter Mount	Selectable 8,500- 18,000 Lm	Selectable 53 - 123 W	120-277V
FSS LS3 G1 FSK T	LED Flood light - Large - Trunnion Mount	Selectable 8,500- 18,000 Lm	Selectable 53 - 123 W	120-277V



# FDC G1

## LED Flood Light Series

### Specifications

 **2,000 - 49,500 Lumens\***

 **4000K - 5000K CCT\***

 **15 - 350 Watts\***

### Controls Compatibility

Emergency Backup: EL UNV-8W

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)

*\*Range based on series, individual fixtures within the series will differ.*



**CONTRACTOR XP**



Catalog Number	Description	Lumens	Watts	Voltage
FDCS 35 G1 4K	LED Flood Light Series, Wide Flood Distribution, Gen 1, 4000K CCT*, , Dark Bronze**	3,600 Lm	27 W	120V-277V
FDCM 80 G1 4K	LED Flood Light Series, Wide Flood Distribution, Gen 1, 4000K CCT*, Dark Bronze**	7,600 Lm	60 W	120-277V
FDCL 130 G1 4K	LED Flood Light Series, Wide Flood Distribution, Gen 1, 4000K CCT*, Dark Bronze**	13,300 Lm	100 W	120-277V
FDCX 260 G1 4K	LED Flood Light Series, Wide Flood Distribution, Gen 1, 4000K CCT*, , Dark Bronze**	26,200 Lm	200 W	120V-277V
FDCH 480 G1 4K	LED Flood Light Series, Wide Flood Distribution, Gen 1, 4000K CCT*, Dark Bronze**	49,500 Lm	350 W	120-277V

\*5000K CCT versions also available. \*\*Also available in Custom colors. See spec sheet/product page for full range of wattages/products.

FDCX and FDCH also available in 4Hx4V Narrow Distribution. FDCL, FDCX, DFCH also available in HVU (347-480V) options.





# FR Select

## LED Selectable Round Floodlights

### Specifications



Switch Selectable  
**1,400 - 4,200 Lumens**



Switch Selectable  
**3000K - 5000K CCT**



Switch Selectable  
**10.5 - 30 Watts**

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



SKU SAVER  
RATING

9

Replaces up to 9  
similar static  
luminaires.

DESIGN XP



Catalog Number	Description	Lumens	Watts	Voltage
FR LS42 SFL G2 FSK	LED Round Flood Light - Spot 15° Beam Distribution - Dark Bronze Finish*	Selectable 1,400 - 4,200 Lm	Selectable 10.5 - 30 W	120-277V
FR LS42 NFL G2 FSK	LED Round Flood Light - Narrow 25° Beam Distribution - Dark Bronze Finish*	Selectable 1,400 - 4,200 Lm	Selectable 10.5 - 30 W	120V-277V
FR LS42 MFL G2 FSK	LED Round Flood Light - Medium Narrow 40° Beam Distribution - Dark Bronze Finish*	Selectable 1,400 - 4,200 Lm	Selectable 10.5 - 30 W	120V-277V

\*Also available in White and Black.



# AP LS1

## LED Selectable Post Top

### Specifications



Switch Selectable  
**6,800 - 17,300 Lumens**



Switch Selectable  
**3000K - 5000K CCT**



Switch Selectable  
**45 - 130 Watts**

### Controls Compatibility



Motion Sensor - MS-ACI-01  
(See page 96)

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



**12** Replaces up to 12  
similar static  
luminaires.



**CONTRACTOR XP**



Catalog Number	Description	Lumens	Watts	Voltage
AP LS1 G1 FSK	LED Post Top - Selectable Power/CCT, Dark Bronze	Selectable 6,800 - 17,300 Lm	Selectable 45 - 130 W	120V - 277V*
AP LS1 G1 FSK B	LED Post Top - Selectable Power/CCT, Black finish	Selectable 6,800 - 17,300 Lm	Selectable 45 - 130 W	120V - 277V*
AP LS1 G1 FSK W	LED Post Top - Selectable Power/CCT, White finish	Selectable 6,800 - 17,300 Lm	Selectable 45 - 130 W	120V - 277V*

\*Also available in HVU (347-480V).





PERFORMANCE XP



# AB G1

## LED Bollard Luminaire

### Specifications



**2,500 Lumens**

Switch Selectable



**3000K - 5000K CCT**



**26 Watts**

### Controls Compatability

Emergency Backup - EL-UNV-8W

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



**3**

Replaces up to 3  
similar static  
luminaires.

Catalog Number	Description	Lumens	Watts	Voltage
AB 30 G1 FSK	LED Bollard Luminaire - Selectable CCT, Gen 1, Dark Bronze	2,500 Lm	26 W	120V - 277V



# WFV Select G2

## LED Selectable Cutoff Wall Pack

### Specifications



Switch Selectable

**2,750 - 13,800 Lumens\***

Switch Selectable

**3000K - 5000K CCT**

Switch Selectable

**18 - 95 Watts\***

### Controls Compatibility



Motion Sensors -

MSB-DCE-06-W-BT5.0

MSB-DCE-06-W (See page 91)

MS-DCE-09-L7-W (See page 95)

Emergency Backup -

EMD-SH05D-UNV-300

EMD-DH08D-UNV-180

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

**12**

Replaces up to 12  
similar static  
luminaires.

\*Range based on series,  
individual fixtures within the  
series will differ.

**PERFORMANCE XP**

Catalog Number	Description	Lumens	Watts	Voltage
WFV LS60 G2 FSK	WFV Architectural Full Cutoff Wall Pack, 4 Level Wattage Adjustable (Max 45W), Gen2, CCT Selectable, With Photocell and Shade, Dark Bronze	Selectable 2,750 - 6,500 Lm	Selectable 18 - 45W	120-277V
WFV LS135 G2 FSK	WFV Architectural Full Cutoff Wall Pack, 4 Level Wattage Adjustable (Max 95W), Gen2, CCT Selectable, With Photocell and Shade, Dark Bronze	Selectable 5,900- 13,800 Lm	Selectable 38 - 90 W	120V-277V





# WFC G1

## LED Selectable Full Cutoff Wall Pack

### Specifications

-  Switch Selectable  
**4,000 - 9,800 Lumens**
-  Switch Selectable  
**3000K - 5000K CCT**
-  Switch Selectable  
**23 - 65 Watts**

### Controls Compatability

Built in Photocell.  
Emergency Backup: EMD-DH08D-UNV-055

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product Page  
Scan QR Code:



SKU SAVER RATING

12

Replaces up to 12 similar static luminaires.



Catalog Number	Description	Lumens	Watts	Voltage
WFC LS1 G1 FSK	LED Full Cutoff Wall Pack	Selectable 4,000 - 9,800 Lm	Selectable 23 - 65 W	120V



# WPC G1

## LED Adjustable Throw Wall Pack

### Specifications



Switch Selectable

**6,600 - 22,000 Lumens\***

Switch Selectable

**3000K - 5000K CCT**

Switch Selectable

**40 - 150 Watts\***

### Controls Compatibility

Motion sensor. Preinstalled photocell.

Emergency Backup.

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

**SKU SAVER  
RATING****48**Replaces up to  
48 similar static  
luminaires.

*\*Range based on series,  
individual fixtures within the  
series will differ.*

**PERFORMANCE XP**

Catalog Number	Description	Lumens	Watts	Voltage
WPC LS140 ST G1 FSK	LED Wall Pack Controlable Pro, Gen 1, Adjustable Power & CCT, Adjustable Light Throw (0°, 15°, 30°, 45°), photocell preinstalled, Dark Bronze	Selectable 6,600 - 14,000 Lm	Selectable 40 - 100 W	120-277V
WPC LS220 ST G1 FSK	LED Wall Pack Controlable Pro, Gen 1, Adjustable Power & CCT, Adjustable Light Throw (0°, 15°, 30°, 45°), photocell preinstalled, Dark Bronze	Selectable 10,000 - 22,000 Lm	Selectable 60 - 150 W	120V-277V



# WMC Select

## LED Selectable Wall Pack



**CONTRACTOR XP**



### Specifications



Switch Selectable  
**3,860 - 11,500 Lumens\***



Switch Selectable  
**3000K - 5000K CCT**



Switch Selectable  
**26 - 100 Watts\***

### Controls Compatability

Photocell

Emergency Backup.

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*



Replaces up to 12 similar static luminaires.

Catalog Number	Description	Lumens	Watts	Voltage
WMC LS1 G2 FSK PE UNV B3	LED Selctable Wall Pack, Gen 2, Adjustable CCT, PE UNV B3 photocell preinstalled, Dark Bronze	Selectable 3,860 - 7,900 Lm	Selectable 26 - 67 W	120-277V
WMC LS2 G2 FSK PC UNV B3	LED Selctable Wall Pack, Gen 2, Adjustable CCT, PC UNV B3 photocell preinstalled, Dark Bronze	Selectable 5,550 - 11,500 Lm	Selectable 39 - 100 W	120V-277V
WMC LS2 G2 HVU FSK	LED Selctable Wall Pack - High Votage, Gen 2, Adjustable CCT, Dark Bronze	Selectable 5,550 - 11,500 Lm	Selectable 39 - 100 W	347 - 480V



# WME G1



## LED Emergency Wall Pack

### Specifications



**1250 Lumens**

**400 Lm Emergency Output**

Switch Selectable



**3000K - 5000K CCT**



**11 Watts, 16 W Max (Emergency)**

### Emergency Specs

90 Min discharge. 24 hour charge time.

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



Catalog Number

Description

Lumens

Watts

Voltage

WME 12 G1 FSK

WME Emergency Wall Pack, 15 Watt, 3 Selectable CCT, 80° Distribution

1250 Lm (Standard)  
400 Lm (Emergency)

11 W Standby,  
16 W Max

120V





# WCE G1

## LED Emergency Wall Pack

### Specifications



**1,300 Lumens**  
300 Lm Emergency Output



**5000K CCT**



**16 W**

### Emergency Specs

90 Min discharge. 24 hour charge time.

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



Catalog Number	Description	Lumens	Watts	Voltage
WCE 13 G1 50K	WCE Contractor Emergency Wall Pack, 16 W, 3 Selectable CCT, Wide Throw Distribution, Dark Bronze finish	1,300 Lm (Standard) 300 Lm (Emergency)	16 W	120-277V
WCE 13 G1 50K W	WCE Contractor Emergency Wall Pack, 16 W, 3 Selectable CCT, Wide Throw Distribution, White finish	1,300 Lm (Standard) 300 Lm (Emergency)	16 W	120-277V
WCE 13 G1 50K B	WCE Contractor Emergency Wall Pack, 16 W, 3 Selectable CCT, Wide Throw Distribution, Black finish	1,300 Lm (Standard) 300 Lm (Emergency)	16 W	120-277V



# Find the right wall pack for your project

PERFORMANCE XP

BEST



**WFV G2**  
FULL CUT OFF WALL PACK

CONTRACTOR XP

GOOD



**WFC G1**  
FULL CUT OFF WALL PACK

PERFORMANCE XP

BEST



**WPC G1**  
ADJUSTABLE THROW WALL PACK

CONTRACTOR XP

GOOD



**WMC G2**  
MEDIUM WALL PACK



BEST



**WME G1**  
EMERGENCY WALL PACK



GOOD



**WCE G1**  
EMERGENCY WALL PACK



# CGC G1

## LED Gas Station Canopy

### Specifications



Switch Selectable  
**6,700 - 23,000 Lumens\***



**5000K CCT**



Switch Selectable  
**40 - 100 Watts\***

### Controls Compatibility



MSB-ACE-04 (Page 91)  
MS-ACE-01 (Page 92)

Emergency Backup: EMD-DH08D-UNV-55

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



\*Range based on series, individual fixtures within the series will differ.

**CONTRACTOR XP**



Catalog Number	Description	Lumens	Watts	Voltage
CGC LS150 G150K	CGC Gas Station Canopy light, Gen 1, 4 Level Wattage Adjustable, 5000K CCT, White finish	Selectable 6,700 - 15,000 Lm	Selectable 40 - 100 W	120 - 277V
CGC LS230 G150K	CGC Gas Station Canopy light, Gen 1, 4 Level Wattage, 5000K CCT Selectable, White finish	Selectable 10,200 - 23,000 Lm	Selectable 60 - 150 W	120 - 277V



# CSC LS1 G1

## LED Selectable Canopy

### Specifications


- 

Switch Selectable  
**4,000 – 8,400 Lumens**
- 

Switch Selectable  
**3000K – 5000K CCT**
- 

Switch Selectable  
**25 – 60 Watts**

### Controls Compatability

- 

Motion Sensor - MS-ACE-01  
(See page 92)
- Emergency Backup - EL-CBOX (Preinstalled)

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)



**12** Replaces up to 12 similar static luminaires.



CONTRACTOR XP



Catalog Number	Description	Lumens	Watts	Voltage
CSC LS1 G1 FSK	LED Selectable Canopy Light - First Generation, Dark Bronze*	Selectable 4,000 – 8,400 Lm	Selectable 25 – 60 W	120V – 277V
CSC LS1 G1 FSK EL-CBOX	LED Selectable Canopy Light - First Generation (Preinstalled Emergency Backup), Dark Bronze*	Selectable 4,000 – 8,400 Lm	Selectable 25 – 60 W	120V – 277V

\*Also available in White.





# PGC G1

## LED Parking Garage - Controls Ready

### Specifications



Switch Selectable  
**2,800 - 12,600 Lumens\***



Switch Selectable  
**3000K - 5000K CCT**



Switch Selectable  
**16 - 80 Watts\***

### Controls Compatibility



MSB-DCE-06-W (Page 91)  
MS-DCE-09-L7-W (Page 95)

#### Emergency Backup.

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



*\*Range based on series, individual fixtures within the series will differ.*

CONTRACTOR XP



Catalog Number	Description	Lumens	Watts	Voltage
PGC LS63 G1 FSK	PGC Parking Garage Light - Controls Ready, Gen 1, 4 Level Wattage Adjustable, Field Selectable CCT	Selectable 2,800 - 6,300 Lm	Selectable 16 - 40 W	120 - 277V
PGC LS94 G1 FSK	PGC Parking Garage Light - Controls Ready, Gen 1, 4 Level Wattage, Field Selectable CCT Selectable	Selectable 4,000 - 9,400 Lm	Selectable 24 - 60 W	120 - 277V
PGC LS120 G1 FSK	PGC Parking Garage Light - Controls Ready, Gen 1, 4 Level Wattage Adjustable, Field Selectable CCT	Selectable 5,500 - 12,600 Lm	Selectable 32 - 80 W	120 - 277V



# PG Select

## LED Selectable Parking Garage

### Specifications



Switch Selectable  
**4,480 - 10,400 Lumens**



Switch Selectable  
**4000K - 5000K CCT**



Switch Selectable  
**32 - 80 Watts**

### Controls Compatibility



Motion Sensor - MS-DCE-09-L7  
(See page 95)

Emergency Backup - EMD-DH08D-UNV-055 (5 Year Warranty only)

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



**8**

Replaces up to 8  
similar static  
luminaires.

**PERFORMANCE XP**



Catalog Number	Description	Lumens	Watts	Voltage
PG LS100 G3 FSK	PG Parking Garage, 4 Level Wattage Adjustable, Gen 3, CCT Selectable, White finish	Selectable 4,480 - 10,400 Lm	Selectable 32- 80 W	120-277V





# VPG G2

## LED Versatile Parking Garage

### Specifications

-  Switch Selectable  
**5,700 - 13,000 Lumens**
-  Switch Selectable  
**4000K - 5000K CCT**
-  Switch Selectable  
**40 - 95 Watts**

### Controls Compatibility

-  **MSB-ACE-04 (Page 91)**  
**MS-ACE-01 (Page 92)**
- Emergency Backup: EMD-DH08D-UNV-55**

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product Page Scan QR Code:



PERFORMANCE XP



Catalog Number	Description	Lumens	Watts	Voltage
VPG 2 LS120 G2 FSK	LED Versatile Parking Garage	Selectable 5,700 - 13,000 Lm	Selectable 40 - 95 W	120-277V



# TEMP G2

## LED High Impact String Lights

### Specifications

 **16,000 Lumens**

 **5000K CCT**

 **130 Watts**

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)



**CONTRACTOR** XP



Catalog Number	Description	Lumens	Watts	Voltage
TEMP 160 G2 50K	Portable Work Lights, 5000K CCT, 10 bulbs included, 100 ft 18/2 SJTW Cord	16,000 Lm	130 W	120V



# TEMPW G1

## LED Temporary Work Light

### Specifications



**13,000 - 19,500 Lumens\***



**5000K CCT**



**100 - 150 Watts\***

*\*Range based on series, individual fixtures within the series will differ.*

(For complete options, accessories, and specification details, please reference full spec sheet.)

Full Product  
Page  
Scan QR Code:



**CONTRACTOR XP**



Catalog Number	Description	Lumens	Watts	Voltage
TEMPW 120 G16CP 50K	LED Temp Work Light 6ft cable with plug, 100W, 5000K CCT	13,000 Lm	100 W	120-277V
TEMPW 180 G16CP 50K	LED Temp Work Light 6ft cable with plug, 150W, 5000K CCT	19,500 Lm	150 W	120-277V
TEMPW 120 G135CP 50K	LED Temp Work Light 35ft cable with plug, 100W, 5000K CCT	13,000 Lm	100 W	120-277V
TEMPW 180 G135CP 50K	LED Temp Work Light 35ft cable with plug, 150W, 5000K CCT	19,500 Lm	150 W	120-277V



# FSP Dual

## LED Remote Driver Sports Light

### Specifications



70,000 - 160,000 Lumens



4000K - 5700K CCT



500 - 1200 Watts

### Controls Compatibility



(For complete options, accessories,  
and specification details, please email  
[chandler.hancock@slgus.com](mailto:chandler.hancock@slgus.com).)

**CALL YOUR REP FOR INFORMATION.**



**PERFORMANCE XP**



### PERFORMANCE DATA

SIZE	SYSTEM WATTS	VOLTAGE	EMA	LUMENS (4000K)	LUMENS (5000K)	LUMENS (5700K)
SMALL	600W	200-480V	4Hx4V	92,000 Lm	92,000 Lm	90,000 Lm
			3Hx3V	92,000 Lm	92,000 Lm	90,000 Lm
LARGE	1200W	200-480V	3Hx3V	16,000 Lm	16,000 Lm	15,000 Lm
			2Hx2V	16,000 Lm	16,000 Lm	15,000 Lm





# FSP Dual RGB

## LED RGB Sports Light

### Specifications



BLUE: 2000 Lm GREEN: 10,000 Lm RED: 12,000 Lm



500 Watts

### Controls Compatibility



(For complete options, accessories, and specification details, please email [chandler.hancock@slgus.com](mailto:chandler.hancock@slgus.com).)

**CALL YOUR REP FOR INFORMATION.**



PERFORMANCE XP

SIZE	SYSTEM WATTS	VOLTAGE	EMA	LUMENS (RED)	LUMENS (GREEN)	LUMENS (BLUE)
SMALL	500W	120-277V 347-480V	4Hx4V	12,000 Lm	10,000 Lm	2,000 Lm



# TOTAL SOLUTION BREAKDOWN

THE GAMEDAY TURNKEY SOLUTION

## DESIGN

Our engineers design to your needs and budget, providing a total solution removing all the guesswork and hassle.

## MANUFACTURING

World class quality manufacturing with 20+ years of experience on your side.

## INSTALLATION

These crews have years of experience specifically installing LED sports field lighting and own the right equipment to get the project completed.

## WARRANTY

All backed by our warranty and easy access customer support system. We treat each project as unique and personal as we value our clients and partners.

100% full support from start to finish on every project, ensuring your project feels as easy as a key turn.

**We go beyond fixtures - we offer a new standard in LED sports lighting.**







## ***Better Warranty, Better Price***

- ***Remote Drivers***
- ***RGB***
- ***Wireless Controls***
- ***Complete Facility Lighting***



**NEW WEBSITE!**

***Scan the QR code now and visit the website!***

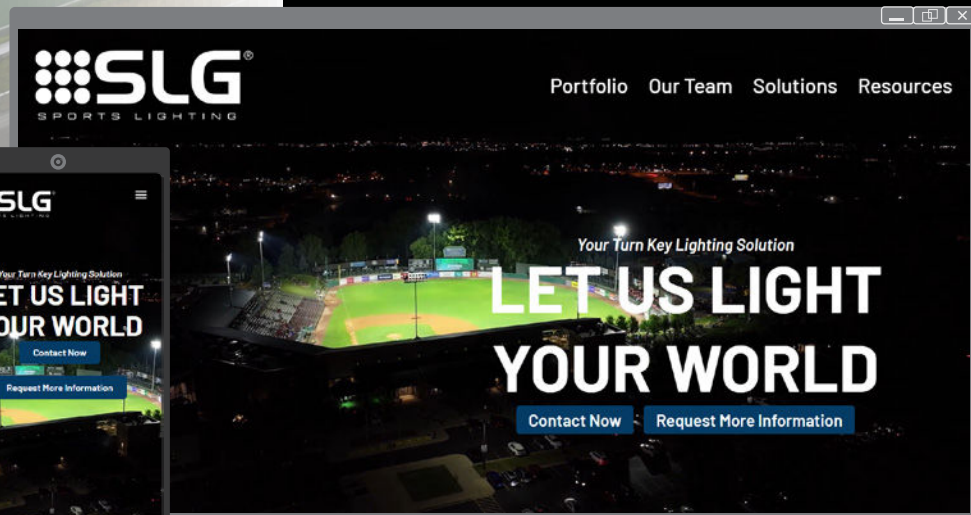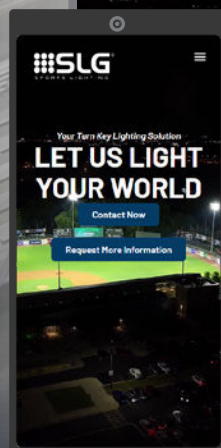





**SLG Sync** is a commercial-grade, network lighting controls system. Utilizing powerful **Bluetooth** technology to connect sensors, fixtures, controllers, wall switches, and our APP for the easiest wireless controls option on the market with the best support.



## Luminaire Level Lighting Control (LLLC)


**SLG Sync has LLLC capabilities** – Capability to integrate/embed an occupancy sensor, ambient light sensor and networked controller directly into a luminaire (fixture) and/or kit at the time of manufacture; and also satisfy the Control Persistence capability.



## APPLICATIONS: OPEN OFFICE

### PRODUCTS USED


- WCB-DC-025
- TPB BLUETOOTH CONTROLS READY PANEL
- MSE-DCI-08
- GROUP

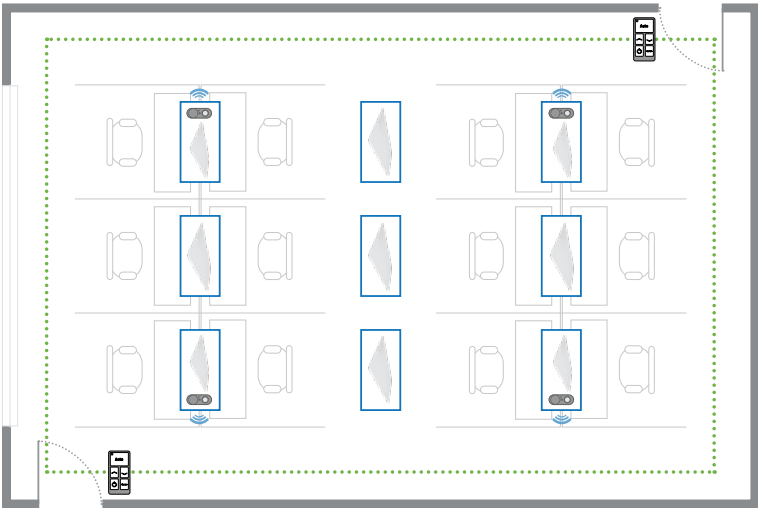

## APPLICATIONS: SMALL OFFICE WITH ATTACHED WAREHOUSE SPACE

### PRODUCTS REQUIRED

- WCB-DC-025
- ZCB-AC-04
- MSB-DCE-06
- MSB-DCE-07
- SR02
- MSB-DCE-06-W
- FCB-DCE-02
- DE DOWNLIGHTS
- ALF AREA LIGHT
- FCB-DCE-02-W
- TDS TROFFER
- TSS STRIP LIGHT
- GROUP

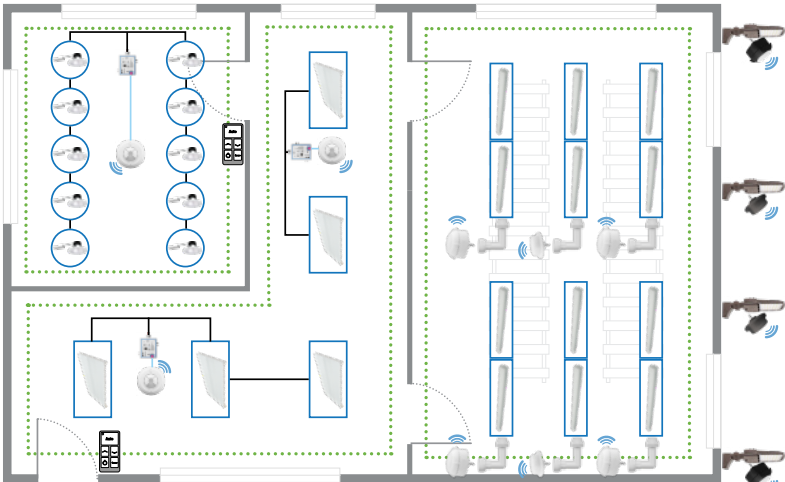

SLG offers full controls layout support - email [layoutrequests@slgus.com](mailto:layoutrequests@slgus.com)



# MSB-DCE-06



## PIN Bluetooth Sensor & Controller

### Specifications

<b>Input Voltage</b> DC 12V	<b>Output Voltage</b> DC 10V	<b>Bluetooth Transmit</b> 200 ft. Max	<b>Detection Range</b> 40 - 80 ft
<b>IP Rating</b> IP66	<b>Output Current</b> 10mA Max	<b>Radio Frequency</b> 2.4 GHz +- 75 MHz	<b>Operating Temperature</b> -30°C to 55°C (-22°F to 131°F)
<b>Input Current</b> 50mA Max	<b>Output Power</b> 0.1W	<b>Mounting Height</b> 20 - 40 ft	<b>Warranty</b> 5 Year warranty
<b>Input Power</b> 0.6 W	<b>Sinking Current</b> 10mA Max	<b>Dimming</b> Class 2, 0-10V DC 10mA Max	

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

**DOES NOT SHIP WITH LENS-MUST ORDER LENS SEPERATE.**



**MSB-DCE-06-W**

Available in weather proof  
finish.

# MSB-ACE-04



## External Bluetooth Sensor & Controller

### Specifications

<b>Input Voltage</b> AC120-277V	<b>Output Voltage</b> AC120-277V	<b>Bluetooth Transmit</b> 200 ft. Max	<b>Detection Range</b> 40 - 80ft
<b>Frequency</b> 50/60Hz	<b>Output Current</b> 10A Max @ 120V 4.3A Max @ 277V	<b>Radio Frequency</b> 2.4 GHz +- 75 MHz	<b>Operating Temperature</b> -30°C to 55°C (-22°F to 131°F)
<b>Input Current</b> 10A Max @ 120V 4.3A Max @ 277V	<b>Output Power</b> 1200W Max	<b>Mounting Height</b> 20 - 40 ft	<b>IP Rating</b> IP66
<b>Input Power</b> 1200W Max	<b>Sinking Current</b> 10mA Max	<b>Dimming</b> Class 2, 0-10V DC 10mA Max	<b>Warranty</b> 5 Year warranty

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

**DOES NOT SHIP WITH LENS-MUST ORDER LENS SEPERATE.**





# MSB-ACI-01

## Integrated Bluetooth Sensor & Controller



### Specifications

<b>Input Voltage</b> AC120-277V	<b>Output Voltage</b> AC120-277V	<b>Bluetooth Transmit</b> 100 ft. Max	<b>Detection Range</b> 32 - 80 ft
<b>Frequency</b> 50/60Hz	<b>Output Current</b> 6A Max @ 120V 2.5A Max @ 277V	<b>Radio Frequency</b> 2.4 GHz +- 75 MHz	<b>Operating Temperature</b> -30°C to 55°C (-22°F to 131°F)
<b>Input Current</b> 6A Max @ 120V 2.5A Max @ 277V	<b>Output Power</b> 700W Max	<b>Mounting Height</b> 20 - 40 ft	<b>Warranty</b> 5 Year warranty
<b>Input Power</b> 700W Max	<b>Sinking Current</b> 10mA Max	<b>Dimming</b> 0-10V DC 10mA Max	



(For complete options, accessories, and specification details, please reference full spec sheet.)

DOES NOT SHIP WITH LENS-MUST ORDER LENS SEPERATE.



SLG SYNC  
BLUETOOTH

# MSB-DCE-07

## Low Voltage Ceiling Sensor



### Specifications

<b>Input Voltage</b> DC 12V	<b>Output Power</b> 0.1W	<b>IP Rating</b> IP66	<b>Operating Temperature</b> -30°C to 55°C (-22°F to 131°F)
<b>Input Current</b> 40mA Max	<b>Sinking Current</b> 10mA Max	<b>Detection Range</b> 50 ft	<b>Warranty</b> 5 Year warranty
<b>Input Power</b> 1.5 W	<b>Bluetooth Transmit</b> 200 ft. Max	<b>Mounting Height</b> 20 ft	
<b>Output Current</b> 10mA Max	<b>Radio Frequency</b> 2.4 GHz +- 75 MHz	<b>Dimming</b> Class 2, 0-10V DC 10mA Max	



(For complete options, accessories, and specification details, please reference full spec sheet.)





# MSB-DCE-08-TL25

## Audio Jack Plugin Low Bay Sensor



### Specifications

<b>Input Voltage</b> DC 12V	<b>Output Power</b> 0.1W	<b>IP Rating</b> IP20	<b>Operating Temperature</b> -30°C to 55°C (-22°F to 131°F)
<b>Input Current</b> 30mA Max	<b>Sinking Current</b> 10mA Max	<b>Detection Range</b> 32 ft (Max.) 16 ft for minor movement)	<b>Warranty</b> 5 Year warranty
<b>Input Power</b> 0.36W	<b>Bluetooth Transmit</b> 100 ft. Max	<b>Mounting Height</b> 15 ft (Max. recommended)	
<b>Output Current</b> 10mA Max	<b>Radio Frequency</b> 2.4 GHz +- 75 MHz	<b>Dimming</b> Class 2, 0-10V DC 10mA Max	

Full Product  
Page  
Scan QR Code:



(For complete options, accessories,  
and specification details, please  
reference full spec sheet.)

# MSB-DCE-08-BT5.0

## Fixture Mounted Sensor



### Specifications

<b>Input Voltage</b> DC 12V	<b>Output Current</b> 10mA Max	<b>Bluetooth Transmit</b> 100 ft. Max	<b>Detection Range</b> 40 ft (Max.)	<b>Warranty</b> 5 Year warranty
<b>Input Current</b> 25mA Max	<b>Output Power</b> 0.1W	<b>Radio Frequency</b> 2.4 GHz +- 75 MHz	<b>Mounting Height</b> 18 ft (Max. recommended)	
<b>Input Power</b> 0.3W	<b>Sinking Current</b> 10mA Max	<b>IP Rating</b> IP20	<b>Dimming</b> Class 2, 0-10V DC 10mA Max	
	<b>Operating Temperature</b> -30°C to 55°C (-22°F to 131°F)			

Full Product  
Page  
Scan QR Code:



(For complete options, accessories,  
and specification details, please  
reference full spec sheet.)

# MSB-DCI-08-BH4S-BT5.0

## Integrated Bluetooth Sensor - BH4S



### Specifications

<b>Input Voltage</b> DC 12V	<b>Input Power</b> 0.3 W	<b>Sinking Current</b> 10mA Max	<b>Dimming</b> Class 2, 0-10V DC 10mA Max
<b>IP Rating</b> IP20	<b>Operating Temperature</b> -30°C to 50°C (-22°F to 122°F)	<b>Bluetooth Transmit</b> 100 ft. Max.	<b>Detection Range</b> 40 ft Max
<b>Input Current</b> 25mA Max	<b>Output Current</b> 10mA Max	<b>Radio Frequency</b> 2.4GHz +- 75MHz	<b>Warranty</b> 5 Year warranty
<b>Output Current</b> 10mA Max	<b>Output Power</b> 0.1W	<b>Mounting Height</b> 18 ft Max recommended	

Full Product  
Page  
Scan QR Code:



(For complete options, accessories,  
and specification details, please  
reference full spec sheet.)



# MSE-DCI-08

## Plug & Play Sensor



### Specifications

<b>Input Voltage</b> DC 12V	<b>Bluetooth Version</b> 4.2	<b>Sinking Current</b> 10mA Max	<b>Mounting Height</b> 18 ft Max
<b>Input Current</b> 25mA Max	<b>Output Current</b> 10mA Max	<b>Bluetooth Transmit</b> 100 ft. Max	<b>Dimming</b> Class 2, 0-10V DC 10mA Max
<b>Input Power</b> 0.3W	<b>Output Power</b> 0.1W	<b>Radio Frequency</b> 2.4 GHz +- 75 MHz	<b>Detection Range</b> 40 ft Max

Full Product  
Page  
Scan QR Code:



(For complete options, accessories, and specification details, please reference full spec sheet.)

### Compatible Bluetooth Fixtures



**TPB**  
Bluetooth Panel



**TDRB**  
Bluetooth Troffer Retrofit Kit



**TDB**  
Bluetooth Troffer



**TSB**  
Bluetooth Strip



# MS-DCE-09-L7



## 3.5mm Pin Sensor & Controller

### Specifications

**Input Voltage**

DC 12V

**Output Signal**

DIM 0-10V

**Operating Temperature**

-20°C to 60°C (-4°F to 140°F)

**IP Rating**

IP65

**Detection Angle**

Fresnel Lens 120°

**Warranty**

5 Year warranty

**Input Current**

<30mA

**Mounting Height**

Up to 40 ft

**Voltage Range**

10 - 15VDC

**Detection Distance**

9 ft

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full  
spec sheet.)



# MS-DCE-08-TL25



## Audio Jack Plugin Low Bay Sensor

### Specifications

**Input Voltage**

DC 12V

**Sinking Current**

10mA Max

**Detection Range**

13 ft (Max.)

**Input Current**

<15mA Max

**IP Rating**

IP20

**Mounting Height**

13 ft (Max. recommended)

**Warm-up Time**

10 Sec.

**Dimming**

Class 2, 0-10V DC 10mA Max

**Warranty**

5 Year warranty

**Standby Power**

<0.5W

**Operating Temperature**

-25°C to 60°C (-13°F to 140°F)

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)





# MS-ACI-01

## AC Basic Integrated Sensor & Controller



### Specifications

<b>Input Voltage</b> AC120-277V	<b>Output Voltage</b> AC120-277V	<b>Mounting Height</b> 20-40 ft	<b>IR Remote Distance</b> 26' MAX
<b>Frequency</b> 60Hz	<b>Output Current</b> 10A Max @ 120V 4.3A Max @ 277V	<b>IP Rating</b> IP66	<b>Operating Temperature</b> -30°C to 65°C (-22°F to 149°F)
<b>Input Current</b> 10A Max @ 120V 4.3A Max @ 277V	<b>Output Power</b> 1200W Max	<b>Dimming</b> 0-10V DC 10mA Max	<b>Housing Material</b> UL 94-5VA
<b>Input Power</b> 1200W Max	<b>Sinking Current</b> 10mA Max	<b>Detection Range</b> 40 - 80 ft	<b>Warranty</b> 5 Year warranty



(For complete options, accessories, and specification details, please reference full spec sheet.)

DOES NOT SHIP WITH LENS-MUST ORDER LENS SEPERATE.

# FCE-ACI-03

## Integrated Controller



### Specifications

<b>Input Voltage</b> AC120-277V	<b>AUX Voltage</b> 12VDC/200mA	<b>Dimming</b> Class 2, 0-10V DC 10mA Max
<b>Frequency</b> 60 Hz	<b>Max Load</b> 120-277VAC 10A E.Ballast, LED, CFL	<b>DIM TO OFF</b> 5%/0.5V
<b>Current</b> 10A Max	<b>Sinking Current</b> 10mA Max	<b>Warranty</b> 5 Year warranty
<b>AUX Voltage</b> 12VDC/200mA	<b>Operating Temperature</b> -30°C to 65°C (-22°F to 149°F)	<b>IP Rating</b> IP20



(For complete options, accessories, and specification details, please reference full spec sheet.)



SLG SYNC  
STANDALONE



# FCB-DCE-02



## DC Bluetooth Fixture Controller

### Specifications

**Input Voltage**

DC 12V

**Output Voltage**

DC 10V

**Bluetooth Transmit**

100 ft. Max

**Warranty**

5 Year warranty

**IP Rating**

IP66

**Output Current**

10mA Max

**Radio Frequency**

2.4 GHz +- 75 MHz

**Input Current**

41mA Max

**Output Power**

0.1W

**Dimming**

Class 2, 0-10V DC 10mA Max

**Input Power**

0.5 W

**Sinking Current**

10mA Max

**Operating Temperature**

-30°C to 65°C (-22°F to 149°F)

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



### FCB-DCE-02-W

Available in weather proof  
finish.

# FCB-ACI-02



## AC Bluetooth Fixture Controller - Sensor Ready

### Specifications

**Input Voltage**

AC120-277V

**Output Voltage**

AC120-277V

**Bluetooth Transmit**

200 ft. Max

**Operating Temperature**

-30°C to 65°C (-22°F to 149°F)

**Frequency**

60 Hz

**Output Current**

3A Max

**Radio Frequency**

2.4 GHz +- 75 MHz

**Warranty**

5 Year warranty

**Input Current**

3.1A Max

**Output Power**

360W Max @ 120V

360W Max @ 277v

**Mounting Height**

20 - 40 ft

**IP Rating**

IP20

**Input Power**

360W Max @ 120V

360W Max @ 277V

**Sinking Current**

10mA Max

**Dimming**

Class 2,  
0-10V DC 10mA Max

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)





# ZCB-AC-04



## 20A Bluetooth Zone Controller

### Specifications

#### Input Voltage

AC120-277V

#### Input Power

2400W Max @ 120V

5540W Max @ 277V

#### Frequency

50/60 Hz

#### Input Current

20A Max

#### Output Voltage

AC120-277V

#### Output Current

20A Max

#### Output Power

2400W Max @ 120V

5540W Max @ 277V

#### Sinking Current

48.5mA Max

#### Operating Temperature

-30°C to 55°C

(-22°F to 131°F)

#### Dimming

Class 2,

0-10V DC 10mA Max

#### Bluetooth Transmit

200 ft. Max.

#### Radio Frequency

2.4GHz +- 75MHz

#### Warranty

5 Year warranty

#### IP Rating

IP20



Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)

# ZCB-AC-09



## UL924 Emergency Bluetooth Lighting Controller

### Specifications

#### Input Voltage

AC120-277V

#### Input Power

5W

#### Frequency

50/60 Hz

#### Input Current

30mA

#### Operating Temperature

-30°C to 50°C

(-22°F to 122°F)

#### Bluetooth Transmit

100 ft. Max.

#### Radio Frequency

2.4GHz +- 75MHz

#### Warranty

5 Year warranty

#### IP Rating

IP20



SLG SYNC  
CONTROLLERS

Full Product  
Page  
Scan QR Code:



(For complete options,  
accessories, and  
specification details,  
please reference full spec  
sheet.)



# ACCESSORIES



**SR01**

PIR - 1/8" Jack  
Receptacle for  
PIR Sensors/Nodes.



**SR02**

PIR - 1/8" Jack  
Receptacle for  
PIR Sensors/Nodes  
- 90° elbow.



**CM01**

Snap-in ceiling  
mount for ceiling  
sensor.




**CS4-22/3-  
300V-W-6FT**

6' cabling for  
ceiling mount  
sensor.



**NCB-DC-01**

Energy monitoring -  
Saves controls  
configurations.



**WCB-DC-025**

5 Key Bluetooth  
switch/remote.




**WCB-DC-025**



**MS-EAD-MF35**



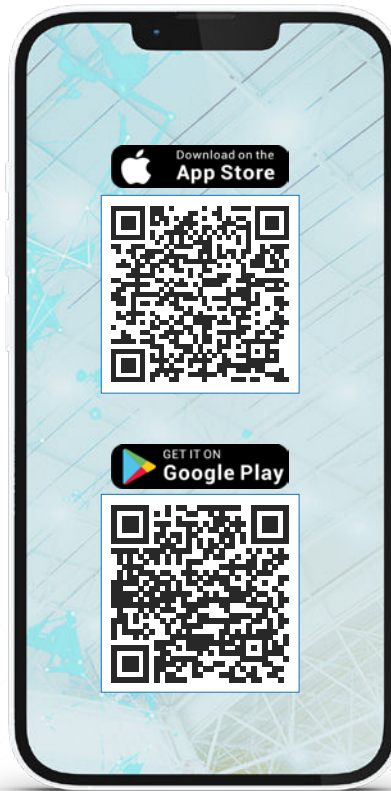

Download the free commissioning app  
by scanning the QR codes.






# Complete the sale

with SLG Safeguard™ egress lighting!

- Full support from one trusted lighting brand
- Simple SKUs for single product quotes
- Priced to complete the total lighting project

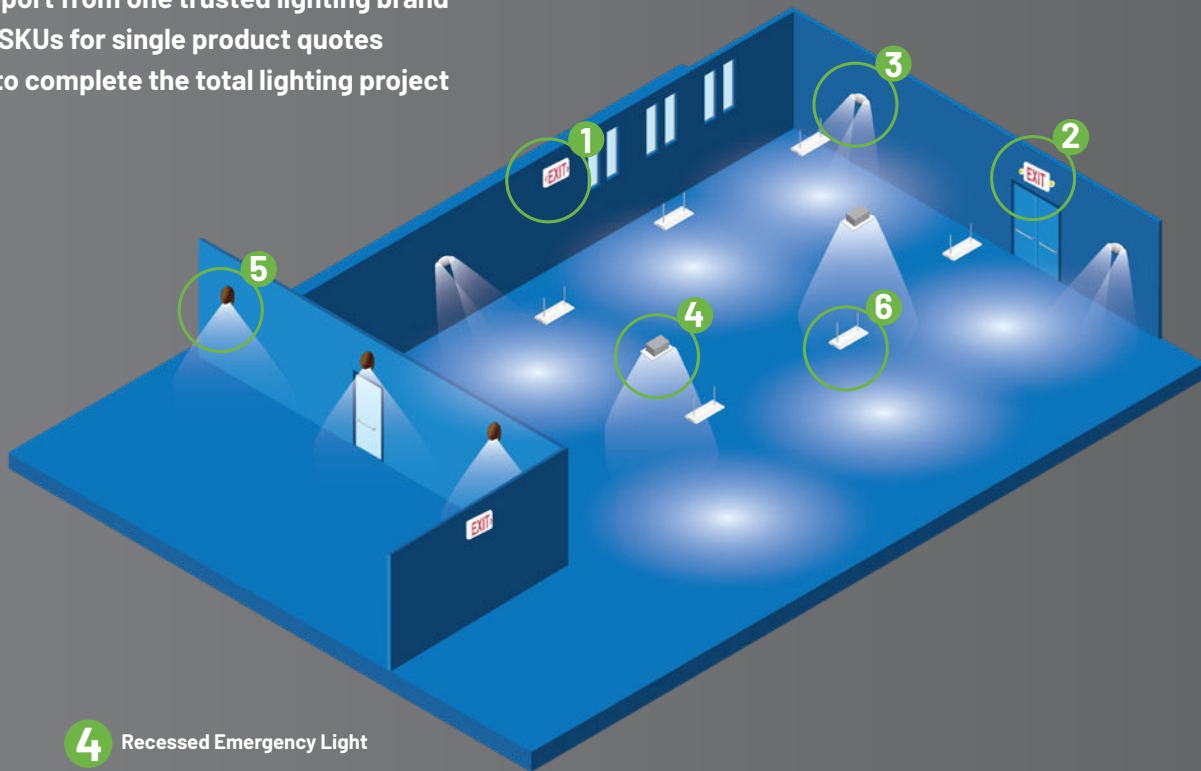

1 Exit Sign

4 Recessed Emergency Light

2 Exit Sign/Light Combo

5 Emergency Wall Pack

3 Emergency Light

6 High Bay



Full U.S. based customer service team available for you and your customers ensuring you're covered from start to finish and beyond.





## EXTP G1

### Thermoplastic Emergency Exit Sign



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	LED Color	Voltage
EXTP G1 U R G W	Thermoplastic Emergency Exit Sign - Red/Green Selectable, Single or Double Sided	Red and Green Selectable	120/277V



## EXEL G1

### Edge-Lit Emergency Exit Sign



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	LED Color	Voltage
EXEL G1 S R C	Edge-Lit Emergency Exit Sign - Red, Clear finish	Red	120/277V
EXEL G1 S G C	Edge-Lit Emergency Exit Sign - Green, Clear finish	Green	120/277V
EXEL G1 D R M	Edge-Lit Emergency Exit Sign - Red, Mirror finish, Double sided	Red	120/277V
EXEL G1 D G M	Edge-Lit Emergency Exit Sign - Green, Mirror finish, Double sided	Green	120/277V



## EXELR G1

### Recessed Mount Edge-Lit Emergency Exit Sign



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	LED Color	Voltage
EXELR G1 S R C	Recessed Edge-Lit Emergency Exit Sign - Red, Clear finish	Red	120/277V
EXELR G1 S G C	Recessed Edge-Lit Emergency Exit Sign - Green, Clear finish	Green	120/277V
EXELR G1 D R M	Recessed Edge-Lit Emergency Exit Sign - Red, Mirror finish, Double sided	Red	120/277V
EXELR G1 D G M	Recessed Edge-Lit Emergency Exit Sign - Green, Mirror finish, Double sided	Green	120/277V



## EXTPW G1

### Wet Location Emergency Exit Sign



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	LED Color	Voltage
EXTPW G1 U R W	Wet Location Exit Sign, Single or Double Sided	Red	120/277V





## ECTP G1

Emergency Exit Sign and Light Combo



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	LED Color/Lumens	Lamphead Output	Voltage
ECTP G1 U RG W	Thermoplastic Emergency Exit Sign & Light Combo - Red/Green Selectable, Single/Double Sided	Red & Green Selectable	160 Lm	120/277V



## ECTPW G1

Wet Location Emergency Exit Sign & Light Combo



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	LED Color	Lamphead Output	Voltage
ECTPW G1 U R W	Wet Location Emergency Exit Sign & Light Combo - Red/Green Selectable, Single or Double Sided	Red	300 Lm	120/277V

# NEW STOCK GUIDE!



Close the Sale with SLG Lighting's new Safeguard series of emergency and egress luminaires! Check out the 2024 Stock Guide to see more!

Scan the QR  
code to check  
it out!







## ELTP LI G1

Thermoplastic Emergency Light - Low Lumen Internal



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	Lamphead Output	Voltage
ELTP G1 LI W	Thermoplastic Emergency Light - Low Lumen, Internal LED lamp heads	210 Lm	120/277V



## ELTP MI G1

Thermoplastic Emergency Light - Medium Lumen Internal



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	Lamphead Output	Voltage
ELTP G1 MI W	Thermoplastic Emergency Light - Medium Lumen, Internal LED lamp heads	700 Lm	120/277V



## ELTPR LI G1

Recessed Emergency Light - Low Lumen Internal



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	Lamphead Output	Voltage
ELTPR G1 LI W	Recessed Emergency Light - Low Lumen, Internal LED lamp heads	250 Lm	120/277V



## ELTPW HI G1

Wet Location Emergency Light - High Lumen Internal



Full Product  
Page  
Scan QR Code:



Catalog Number	Description	Lamphead Output	Voltage
ELTPW G1 HI W	Wet Location Emergency Light - High Lumen, Internal LED lamp heads	1450 Lm	120/277V



## ELTPW ME G1

Wet Location Emergency Light - Medium Lumen External






Full Product  
Page  
Scan QR Code:



Catalog Number	Description	Lamphead Output	Voltage
ELTPW G1 ME W	Wet Location Emergency Light - Medium Lumen, External LED lamp heads	660 Lm	120/277V



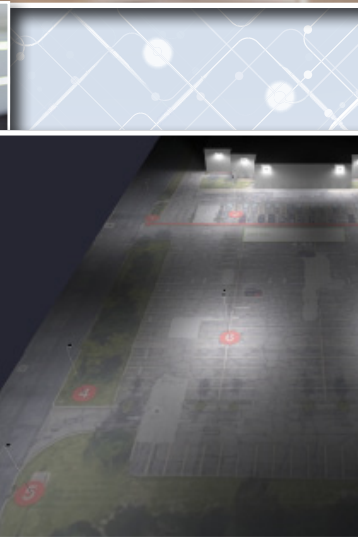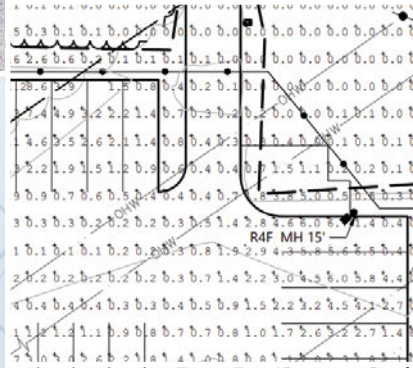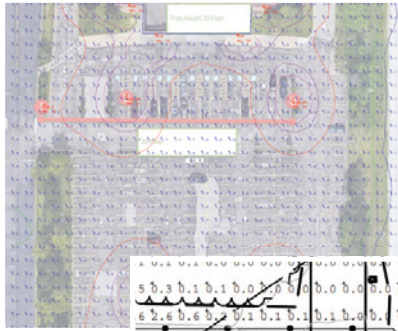




# FREE LAYOUT REQUESTS

Our team of Lighting Specialists are on staff in our Houston, TX office M-F, ready to help you have the best lighting for you and your customers projects. Most projects are same day turn-around times and our team is available for any and all assistance even after you receive the layout.

Send all inquiries to:  
[LayoutRequests@slgus.com](mailto:LayoutRequests@slgus.com)

Or contact your local SLG Lighting rep to  
help you along the way.

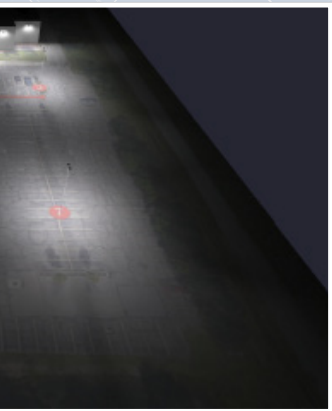





# TRAINING CENTER



At the heart of our Houston HQ is our training center where we invite our partners for the latest training, host internal training, and showcase our latest products.





# ***We'll come to you!***

MOBILE  
SHOWROOM



With 3 mobile showrooms across the U.S. there's always an opportunity to see the latest from SLG Lighting. Our reps and distributors host events, BBQ's, and more using the unique SLG Mobile Showroom that's filled with the latest SLG products and FREE swag.

Contact your local SLG rep to find out when the SLG Mobile Showroom will be in your area!






# The More You Know...

We offer a large assortment of resources and marketing material FREE on our website. This includes...



Case studies...

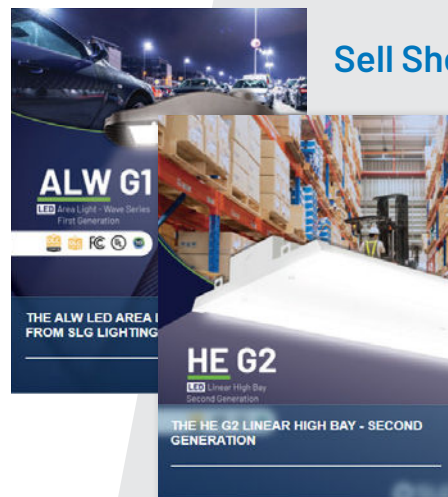


Sell Sheets...



"Brighter Things" Monthly Newsletter

Access these any time by visiting [www.slqus.com/literature](http://www.slqus.com/literature) or scan the QR code.















Looking for something in particular or cobranded?  
Send an email to [marketing@slqus.com](mailto:marketing@slqus.com)



# Seeing is Believing...

Our YouTube page is the best place to see the latest from SLG! Product videos, installation videos, and more - all available at anytime.

 <p><b>How to Install - LED Full Cut Off Wall Pack featuring the WFV G2</b></p> <p>30 views • 3 days ago</p>	 <p><b>Indoor Commercial LED Masterclass - Revolutionize Your...</b></p> <p>14 views • 5 days ago</p>	 <p><b>Watts On The Table? - LED Full Cut Off Wall Pack from SLG Lighting</b></p> <p>31 views • 13 days ago</p>	 <p><b>SLG Sports Lighting - Wireless Lighting Controls Guide</b></p> <p>5 views • 1 month ago</p>
 <p><b>SLG Sports Lighting - Complete Facility Lighting</b></p> <p>10 views • 1 month ago</p>	 <p><b>SLG Sports Lighting - Gameday Turnkey Solution</b></p> <p>1 view • 1 month ago</p>	 <p><b>SLG Sports Lighting - The Go Method™ (5 Easy Parts)</b></p> <p>7 views • 1 month ago</p>	 <p><b>How To Install - LED Surface Mount Downlight featuring DSD Series</b></p> <p>361 views • 1 month ago</p>
 <p><b>Watts On The Table? - LED Surface Mount Downlight from SLG Lighting</b></p> <p>60 views • 1 month ago</p>	 <p><b>DSD Series - LED Downlight Product Showcase</b></p> <p>53 views • 2 months ago</p>	 <p><b>"Committed to America" - ESCO - TAA - LED Lighting</b></p> <p>13 views • 2 months ago</p>	 <p><b>Llano TX Tennis Field - SLG Sports Lighting</b></p> <p>12 views • 2 months ago</p>

Subscribe to the channel and stay connected - we're always adding more videos.

[www.youtube.com/@SLGLighting](https://www.youtube.com/@SLGLighting) or scan the QR code.





This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal gray lines across the entire width of the page, providing a guide for writing. The background is a clean, solid white color.



This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal gray lines across its entire width, providing a template for writing or drawing. The margins are consistent on all sides.



[slgus.com](http://slgus.com)

Your experience matters.

**Sales**

P: (713) 389-5680

E: [sales@slgus.com](mailto:sales@slgus.com)

**SLG Sports Lighting**

P: (903) 407-0555

E: [chandler.hancock@slgus.com](mailto:chandler.hancock@slgus.com)

**Marketing**

E: [marketing@slgus.com](mailto:marketing@slgus.com)

